

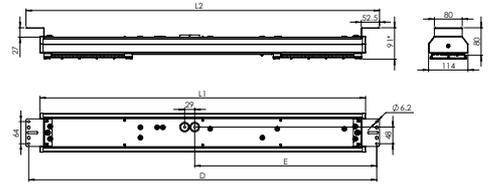






# GLENBURN SLIM RANGE



L1 mm	L2 mm	D mm	E mm	Weight kg
935	1015	999	523	1.5
1190	1270	1254	87	2.2
1444	1524	1508	779	2.8
1953	2033	2017	1032	4.1

IP65 
 IK08 
 L80/B50 
 100,000 hrs



The Glenburn Slim range is a versatile IP65 high bay luminaire suitable for all warehouse and sports hall applications. Supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps, the Glenburn Slim is available with a range of control options including a batten fit PIR and corridor function. The emergency range of the Glenburn Slim emergency versions are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The Glenburn Slim range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Length mm	Power W	40° optic lm	60° optic lm	75° optic lm	120° optic lm	30°x65° optic lm	90°x90° optic lm	Weight kg
TLGLSL/10500/4K	935	41	10031	10472	10031	10472	9921	10472	1.5
TLGLSL/12530/4K	935	47	11829	12348	11829	12348	11699	12348	1.5
TLGLSL/14250/4K	935	59	13640	14240	13640	14240	13490	14240	1.5
TLGLSL/15650/4K	1190	70	14969	15627	14969	15627	14805	15627	2.2
TLGLSL/18550/4K	1190	83	17743	18523	17743	18523	17548	18523	2.2
TLGLSL/21250/4K	1190	91	20355	21250	20355	21250	20131	21250	2.2
TLGLSL/24700/4K	1444	115	23657	24697	23657	24697	23397	24697	4.3
TLGLSL/26450/4K	1444	139	25315	26428	25315	26428	25037	26428	2.8
TLGLSL/28350/4K	1444	163	27140	28333	27140	28333	26842	28333	2.8
TLGLSL/31100/4K	1953	171	29784	31094	29784	31094	29457	31094	4.1
TLGLSL/36900/4K	1953	207	35302	36854	35302	36854	34914	36854	4.1
TLGLSL/42300/4K	1953	244	40499	42279	40499	42279	40054	42279	4.1

DD = DALI Dimmable  
 E = Emergency  
 3K = 3000K CCT  
 75D = 75° optic

SD = SwitchDim  
 ST = Self Test Emergency  
 PIR = Batten fit PIR  
 120D = 120° optic

MD = Mymesh Dim  
 ME = Mymesh Emergency  
 40D = 40° optic  
 3565D = 35°X65° optic

CD = Casambi Dim  
 SL\*\* = Slave  
 60D = 60° optic  
 9090D = 90°X90° optic

# GLENBURN SLIM ACCESSORIES

TLGLSL/SUSP/1.5M  
Glenburn suspension kit 1.5m

TLGLSL/SUSP/3M  
Glenburn suspension kit 3m

TLGLSL/SUSP/5M  
Glenburn suspension kit 5m

TLGLSL/WG  
Glenburn wire guard kit

TLGLSL/SB  
Glenburn suspension brackets (pair)

TLGLSL/ADB  
Glenburn adjustable brackets +/- 75 degrees(pair)

