



BIRKRIG RANGE

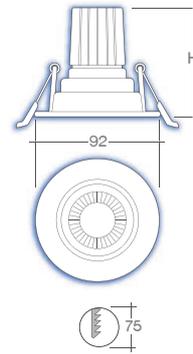


powered by
TRIDONIC

24 degree



36 degree



- IP20
- IK04
- LB**
- L70/B50**
50,000 hrs

The Birkrig range offers adjustable downlighters that come in two standard color finishes: black and white. There are different configurations to choose from, including three color temperatures and various lumen outputs. The LED module comes with a remote LED driver that is suitable for dimmable and high output applications.

Additionally, there is a 230v GU10 option available that comes with a Philips GU10 5w LED lamp as standard.

The Birkrig range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Diameter mm	Height mm	Cut out mm	CRI	CCT K
TLBIRK/700/2.7K	10	770	92	65	75	90	2,700
TLBIRK/700/3K	10	840	92	65	75	90	3,000
TLBIRK/700/4K	10	890	92	65	75	90	4,000
TLBIRK/1200/2.7K	13	1140	92	75	75	90	2,700
TLBIRK/1200/3K	13	1170	92	75	75	90	3,000
TLBIRK/1200/4K	13	1270	92	75	75	90	4,000
TLBIRK/GU10/2.7K	5	355	92	85	75	80	2,700

DD = DALI Dimmable
E = Emergency
24D = 24deg optic

SD = SwitchDim
ST = Self Test Emergency
36D = 36deg optic

MD = Mymesh Dim
ME = Mymesh Emergency
BLK = Black housing

CD = Casambi Dim
SL** = Slave
TW = Tunable White