



EARHART RANGE

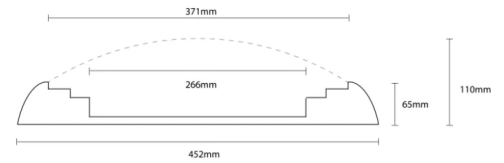

powered by
TRIDONIC



IP IP44 **IK** IK10 **LB** L80/B10
72,000 hrs

The Earhart bulkhead is a premium quality fitting that is well-suited to hospitals and prisons due to its anti-ligature properties. It is made of aluminum and has a smooth surface that makes cleaning and maintenance easy. The front features an opal polycarbonate diffuser that is held in place by three tamper-resistant screws.

The Earhart can be mounted on either the wall or the ceiling. It is available in 3000K and 4000K and supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps.

The Earhart range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Diameter mm	Height mm	Efficacy lm/W	CRI	CCT K
TLEAR/1500/3K	13	1466	452	110	110	80	3,000
TLEAR/1500/4K	13	1543	452	110	116	80	4,000
TLEAR/2000/3K	17	1925	452	110	110	80	3,000
TLEAR/2000/4K	17	2026	452	110	116	80	4,000
TLEAR/2500/3K	21	2361	452	110	111	80	3,000
TLEAR/2500/4K	21	2484	452	110	116	80	4,000

DD = DALI Dimmable SD = SwitchDim MD = Mymesh Dim CD = Casambi Dim
 E = Emergency ST = Self Test Emergency ME = Mymesh Emergency SL** = Slave
 CF = Corridor Function MW = Sensor On/Off