



# ELMWOOD RANGE

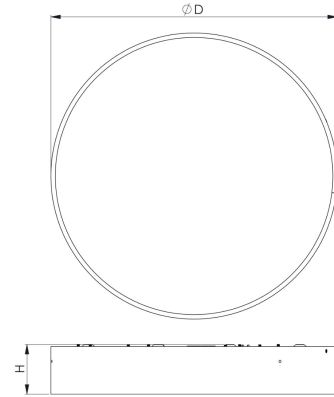

 IP65
  IK10
  L70/B50  
 50,000 hrs

The Elmwood range is crafted from impact resistant polycarbonate and fitted with a UV satabalised diffuser. Supplied as CRI 80 as standard, with a colour stability of 6 MacAdam steps, the Elmwood is available with white or black base and either cool or warm white colour temperature and along with a range of control options including corridor function. The emergency range of the Elmwood emergency versions are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The Elmwood range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Diameter mm	Height mm	Efficacy lm/W	CCT K	Weight kg
TLELM/2500/3K	22	2373	352	68	106	3000	1.4
TLELM/2500/4K	22	2506	352	68	112	4000	1.4

DD = DALI Dimmable      SD = SwitchDim      MD = Mymesh Dim      CD = Casambi Dim  
 E = Emergency          ST = Self Test Emergency      ME = Mymesh Emergency      SL\*\* = Slave  
 CF = Corridor Function      MW = Sensor On/Off      WH = White base      BL = Black base