



# EDENHURST RANGE

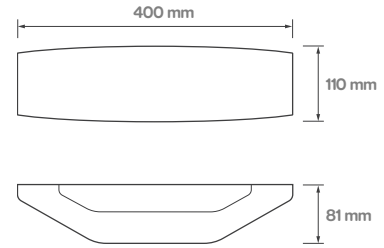

powered by  
**TRIDONIC**



IP20  
 IK05  
 L80/B10  
 60,000 hrs

The Edenhurst range incorporates a powder-coated steel body and acrylic opal diffusers along with Tridonic high-performance LED boards and driver giving a bidirectional homogeneous illumination. It is ideal for commercial and domestic use and has been designed to be both economical and efficient.

Supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps, the Edenhurst is available in a white or black finish and either cool or warm white colour temperature and along with a range of control options. The emergency range of the Edenhurst are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The Edenhurst range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Length/Width mm	Height mm	Efficacy lm/W	CRI	CCT K
TLEDEN/800/3K	9	790	400	110	89	80	3,000
TLEDEN/800/4K	9	826	400	110	93	80	4,000
TLEDEN/1500/3K	16	1479	400	110	90	80	3,000
TLEDEN/1500/4K	16	1548	400	110	94	80	4,000
TLEDEN/2200/3K	24	2149	400	110	88	80	3,000
TLEDEN/2200/4K	24	2248	400	110	92	80	4,000

DD = DALI Dimmable  
E = Emergency  
CF = Corridor Function

SD = SwitchDim  
ST = Self Test Emergency  
WH = White finish

MD = Mymesh Dim  
ME = Mymesh Emergency  
BL = Black finish

CD = Casambi Dim  
SL\*\* = Slave