



# WHEATLEA RANGE

## DIRECT VERSION

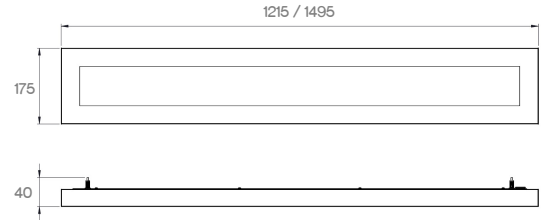

-  IP40
-  IK05
-  L80/B50
- 100,000 hrs

The Wheatlea range is a high-quality linear luminaire that boasts LG7 compliance with its low glare micrismatic diffuser makes it both visually pleasing and suitable for various installations. Available as a single stand-alone fitting or as a continuous system with various size blanks, these can be surface mounted or suspended.

The Wheatlea is available in 3000K and 4000K offering a range of lumen packages to suit any environment. It is energy-efficient, flicker-free, and produces minimal heat, ensuring a long lifespan of at least 100,000 hours. This makes it an ideal, eco-friendly choice for commercial and retail applications.

The Wheatlea range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Length mm	Width mm	Height mm	Output lm	Power W	Efficacy lm/W	CRI Ra	CCT K	Weight kg
TLWHE/D/1200/2500/3K	1215	175	40	2551	19	136	80	3000	4.1
TLWHE/D/1200/2500/4K	1215	175	40	2689	19	144	80	4000	4.1
TLWHE/D/1200/3500/3K	1215	175	40	3327	22	149	80	3000	4.1
TLWHE/D/1200/3500/4K	1215	175	40	3507	22	157	80	4000	4.1
TLWHE/D/1200/4500/3K	1215	175	40	4336	30	146	80	3000	4.1
TLWHE/D/1200/4500/4K	1215	175	40	4570	30	153	80	4000	4.1
TLWHE/D/1500/3000/3K	1495	175	40	3189	22	143	80	3000	5.1
TLWHE/D/1500/3000/4K	1495	175	40	3362	22	151	80	4000	5.1
TLWHE/D/1500/4000/3K	1495	175	40	4159	27	152	80	3000	5.1
TLWHE/D/1500/4000/4K	1495	175	40	4383	27	160	80	4000	5.1
TLWHE/D/1500/5000/3K	1495	175	40	5419	37	147	80	3000	5.1
TLWHE/D/1500/5000/4K	1495	175	40	5713	37	155	80	4000	5.1

DD = DALI Dimmable  
E = Emergency  
TW = Tunable White

SD = SwitchDim  
ST = Self Test Emergency  
PIR = PIR Sensor

MD = Mymesh Dim  
ME = Mymesh Emergency  
CN = Continuous System

CD = Casambi Dim  
SL\*\* = Slave

# WHEATLEA RANGE

## DIRECT VERSION

### Accessories



TLWHE/SUS  
Y suspension kit 1.5m



TLWHE/CAB  
2m clear cable



TLWHE/SCR  
Square ceiling rose



TLWHE/CPL  
Coupling joint kit



TLWHE/BL3  
Wheatlea blank 300mm



TLWHE/BL6  
Wheatlea blank 600mm



TLWHE/BL12  
Wheatlea blank 1215mm