




# RUNNER RANGE



IP IP20



IK04



L90/B10  
60,000 hrs

Colours :    
Black White

powered by  
**TRIDONIC**


The Runner Range consists of three sizes of recessed frames. Each directional 16W spotlight is available in 4 different beam angles, 15°, 24°, 36° and 50°. 3000K and 4000K colour temperature and CRI 80 and CRI 90 options to choose from and with a colour stability within 3 MacAdam steps and a lifetime of upto 60,000 hours.

The Runner range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Application: Residential, shopping mall, shop, hotel room, restaurant & bar, museum, art gallery, showroom, office.





# RUNNER 1

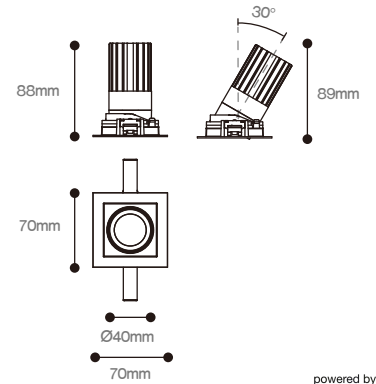

powered by  
**TRIDONIC**

Colours : ● Black ○ White



Part code	Power W	Output lm	Efficacy lm/W	CCT K	CRI Ra	Weight kg
TLRUN/1/80/3K	16	1435	91	3000	80	1.2
TLRUN/1/80/4K	16	1510	96	4000	80	1.2
TLRUN/1/90/3K	16	1219	77	3000	90	1.2
TLRUN/1/90/4K	16	1284	81	4000	90	1.2

BH = Black Finish

WH = White Finish

DD = DALI Dimmable

MD = Mymesh Dim

CD = Casambi Dim

15D = 15° Lens


24D = 24° Lens

36D = 36° Lens

50D = 50° Lens





# RUNNER 2

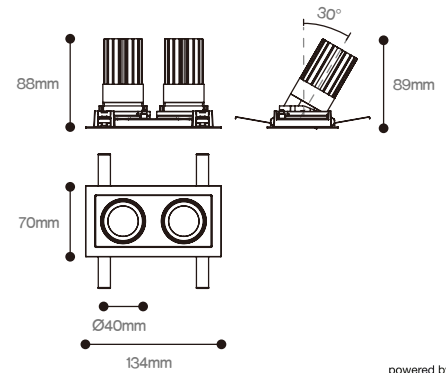

powered by  
**TRIDONIC**

Colours : ● Black ○ White



Part code	Power W	Output lm	Efficacy lm/W	CCT K	CRI Ra	Weight kg
TLRUN/2/80/3K	32	2870	91	3000	80	2.2
TLRUN/2/80/4K	32	3020	96	4000	80	2.2
TLRUN/2/90/3K	32	2438	77	3000	90	2.2
TLRUN/2/90/4K	32	2568	81	4000	90	2.2

BH = Black Finish

WH = White Finish

DD = DALI Dimmable

MD = Mymesh Dim

CD = Casambi Dim


15D = 15° Lens

24D = 24° Lens

36D = 36° Lens



50D = 50° Lens

# RUNNER 3

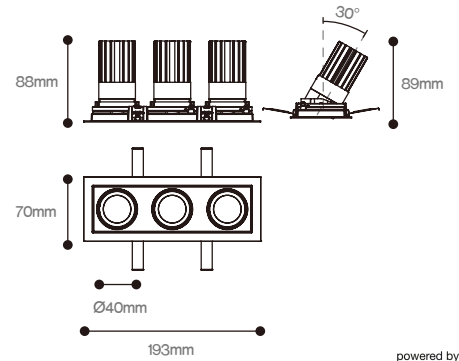

powered by  
**TRIDONIC**

Colours : ● Black ○ White



Part code	Power W	Output lm	Efficacy lm/W	CCT K	CRI Ra	Weight kg
TLRUN/3/80/3K	47	4305	91	3000	80	3.1
TLRUN/3/80/4K	47	4530	96	4000	80	3.1
TLRUN/3/90/3K	47	3657	77	3000	90	3.1
TLRUN/3/90/4K	47	3852	81	4000	90	3.1

BH = Black Finish

WH = White Finish

DD = DALI Dimmable

MD = Mymesh Dim

CD = Casambi Dim

15D = 15° Lens

24D = 24° Lens

36D = 36° Lens

50D = 50° Lens

