

TROJAN

INTELLIGENT LIGHTING SOLUTIONS

FILPOT SERIES



FILPOT SERIES

FILPOT SERIES is a modern, sleek, efficient indoor lighting solution with convenient installation as well as versatility. It is designed to provide an even and soft illumination, avoiding harsh glare.

Application such as living rooms, bedrooms as well as hospitality, providing comfortable illumination.

Shape (Baffle Size)



Round
65

Round
85

Round
110



Square
110



Mountings



Recessed
Trim

Recessed
Trimless

Light distributions



Fixed

Adjustable

FILPOT SERIES

	65 Fixed	65 Adjustable	85 Fixed	85 Adjustable
Cone baffle	<hr/>		<hr/>	
Trim				
Trimless				
Pinhole baffle	<hr/>		<hr/>	
Trim				
Trimless				

FILPOT SERIES



	110 Fixed	110 Adjustable
Cone baffle		
Trim		
Trimless		
Pinhole baffle		
Trim		
Trimless		
Trim		
Trimless		

FILPOT SERIES





Cone baffle

It is a multifunctional accent light that can highlight a single object or architectural element. Available in fixed and adjustable versions, while the adjustable version can be precisely set to tilt at an angle of up to 30 degrees, so the light will be emitted exactly where you want it. There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.

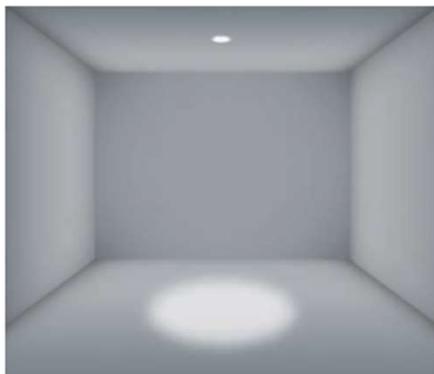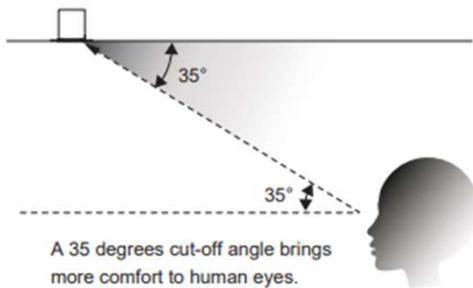


Pinhole baffle

It is a multifunctional accent light that can highlight a single object or architectural element. To further reduce the visual impact on the ceiling, the pin hole baffle is used to bring the luminaire flush with the ceiling for added glare protection and a 40 degree cut-off angle. Fixed and adjustable functions are available, while the adjustable version can be precisely set to a tilt angle of up to 30 degrees, so the light will be emitted exactly where you want it. There are also different accessories to choose from, adding more flexibility and freedom for lighting designers. Suitable for hotels and residences.

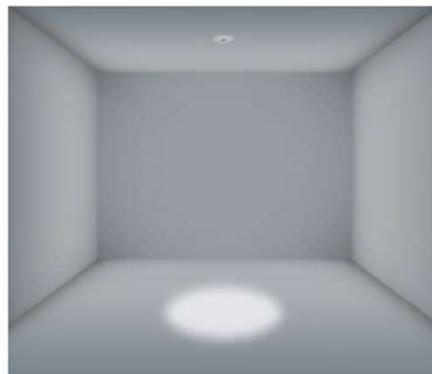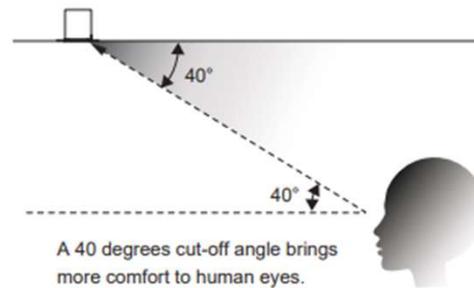

FILPOT SERIES

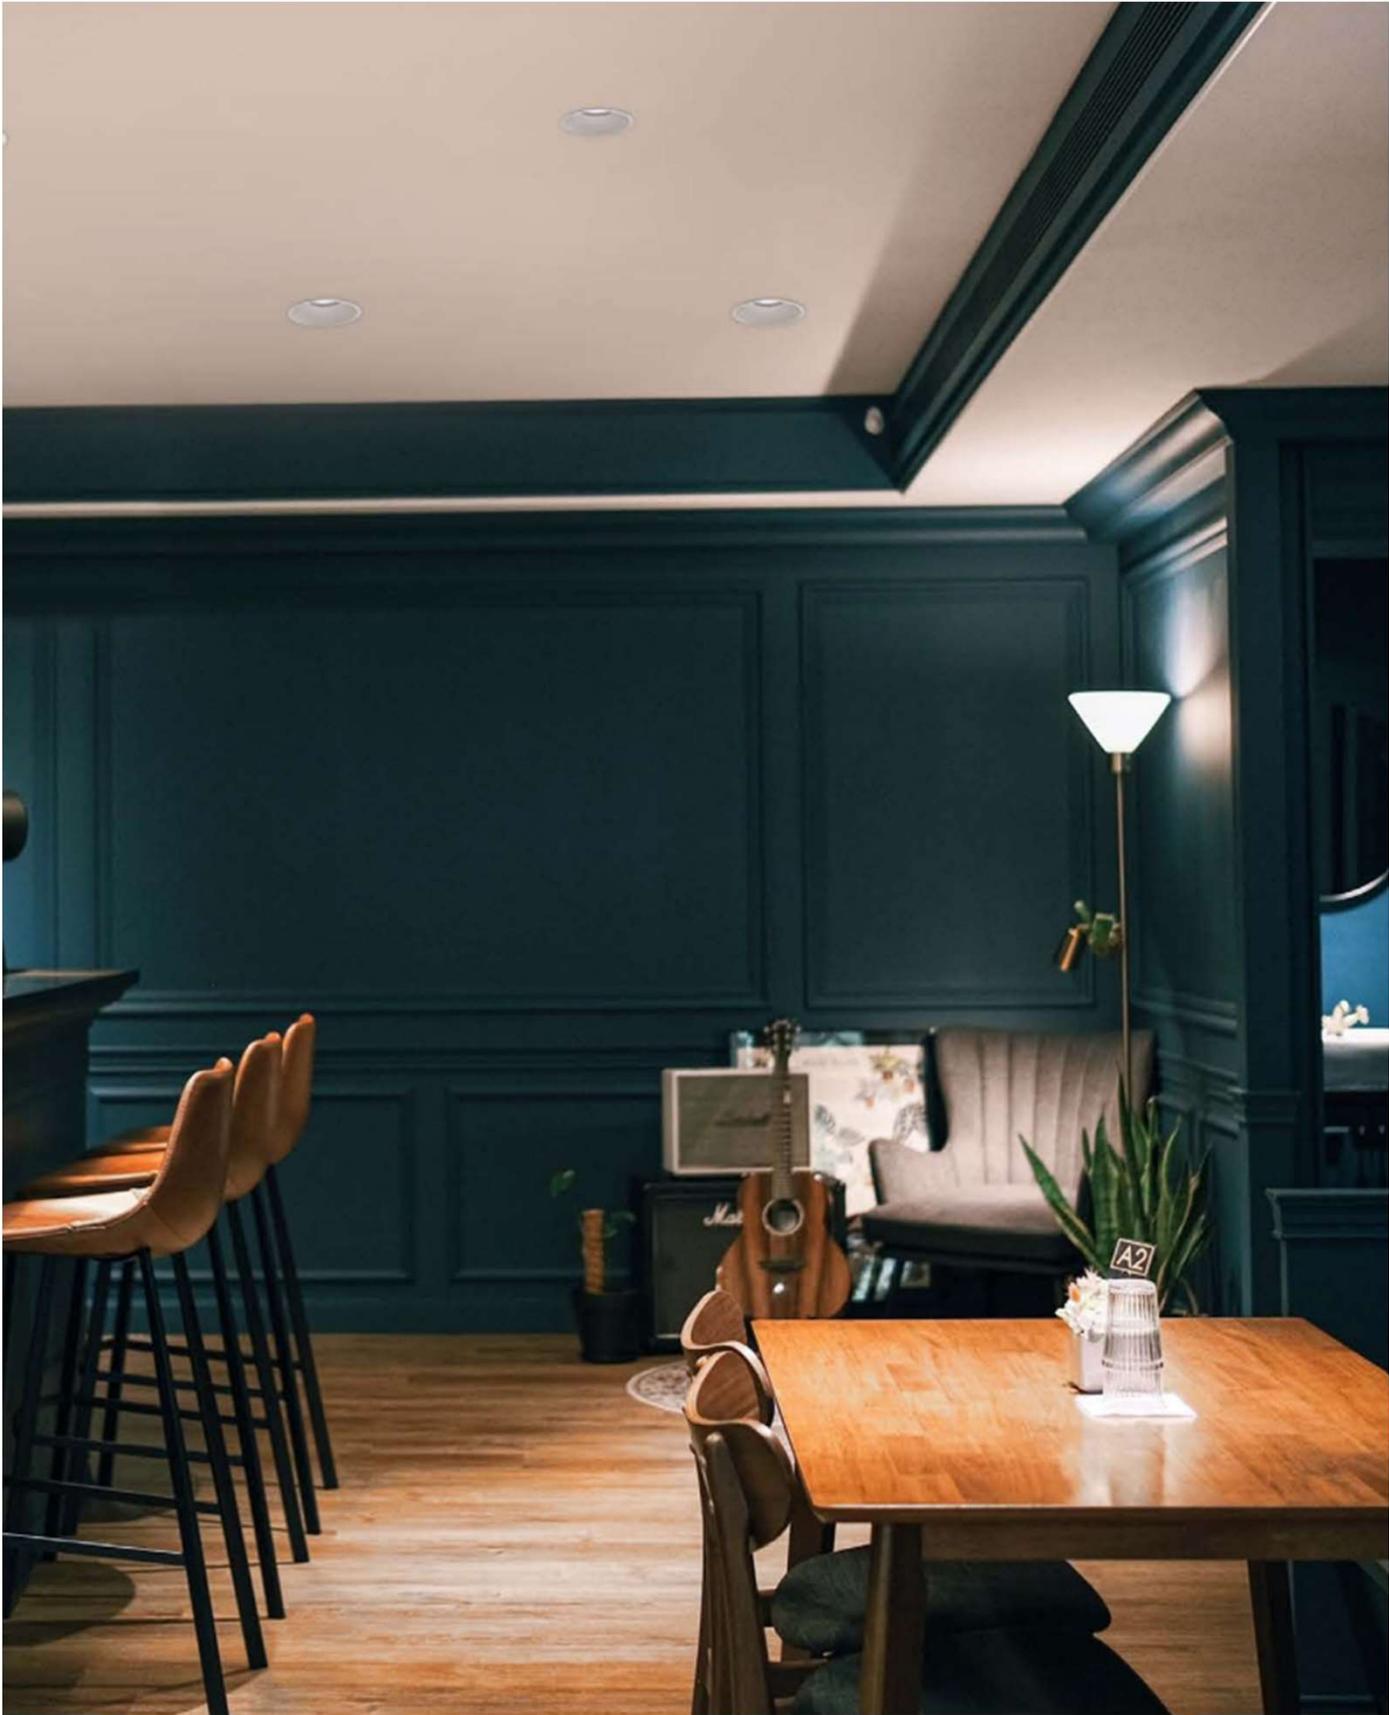

FILPOT SERIES


65/85/110 round fixed/adjustable



Specification

2700 K, 3000 K, 4000 K,
(Dim to warm) For 110
CRI \geq 90
DALI, TRIAC, 1-10V

Types



Colours

Bezel :  
Black White
Baffle :  
Black White

Beam Angle


10°
   
15°/24°/36°/50° (Lens)

FILPOT SERIES

65/85/110 round fixed/adjustable



FILPOT SERIES 65 10W


Trim Round Curve




LED Consumption	10W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable




Accessories




LED Consumption	10W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 65 10W

Trimless Round Curve




LED Consumption	10W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable



Accessories




LED Consumption	10W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 65 10W


Trim Round T/W Curve




LED Consumption	10W
Current	250 (mA)
Lumen	680-882 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	2700K-6500K
CRI	90+



Dimmable




Accessories




LED Consumption	10W
Current	250 (mA)
Lumen	680-882 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	2700K-6500K
CRI	90+



Dimmable



Accessories




FILPOT SERIES 65 10W


Trimless Round T/W Curve




LED Consumption	10W
Current	250 (mA)
Lumen	680-882 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	2700K-6500K
CRI	90+



Dimmable




Accessories




LED Consumption	10W
Current	250 (mA)
Lumen	680-882 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	2700K-6500K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 85 10W


Trim Round Curve




LED Consumption 10W
Current 800 (mA)
Lumen 774 (lm)
Beam Angle 10° (Lens)
CCT 3000K
CRI 90+



Dimmable





Accessories




LED Consumption 10W
Current 800 (mA)
Lumen 774 (lm)
Beam Angle 10° (Lens)
CCT 3000K
CRI 90+



Dimmable



Accessories



FILPOT SERIES 85 10W


Trimless Round Curve



LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	10° (Lens)
CCT	3000K
CRI	90+



Dimmable




Accessories




LED Consumption	10W
Current	800 (mA)
Lumen	774 (lm)
Beam Angle	10° (Lens)
CCT	3000K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 85 12W

Trim Round Curve




LED Consumption	12W
Current	350 (mA)
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




LED Consumption	12W
Current	350 (mA)
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable



Accessories



Dimmable



Accessories



FILPOT SERIES 85 12W

Trimless Round Curve



LED Consumption	12W
Current	350 (mA)
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



LED Consumption	12W
Current	350 (mA)
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/50° (L)
CCT	3000K
CRI	90+




Dimmable



Dimmable



Accessories



Accessories



FILPOT SERIES 110 18W

Trim Round Curve




LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.133-LEE-15-DW


LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable



Accessories




LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.137-LEE-15-DW


LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 110 18W

Trimless Round Curve



LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.214F-LEE-15-DW


LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable



Accessories



LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.216F-LEE-15-DW

LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable




Accessories



FILPOT SERIES


65/85/110 round fixed/adjustable

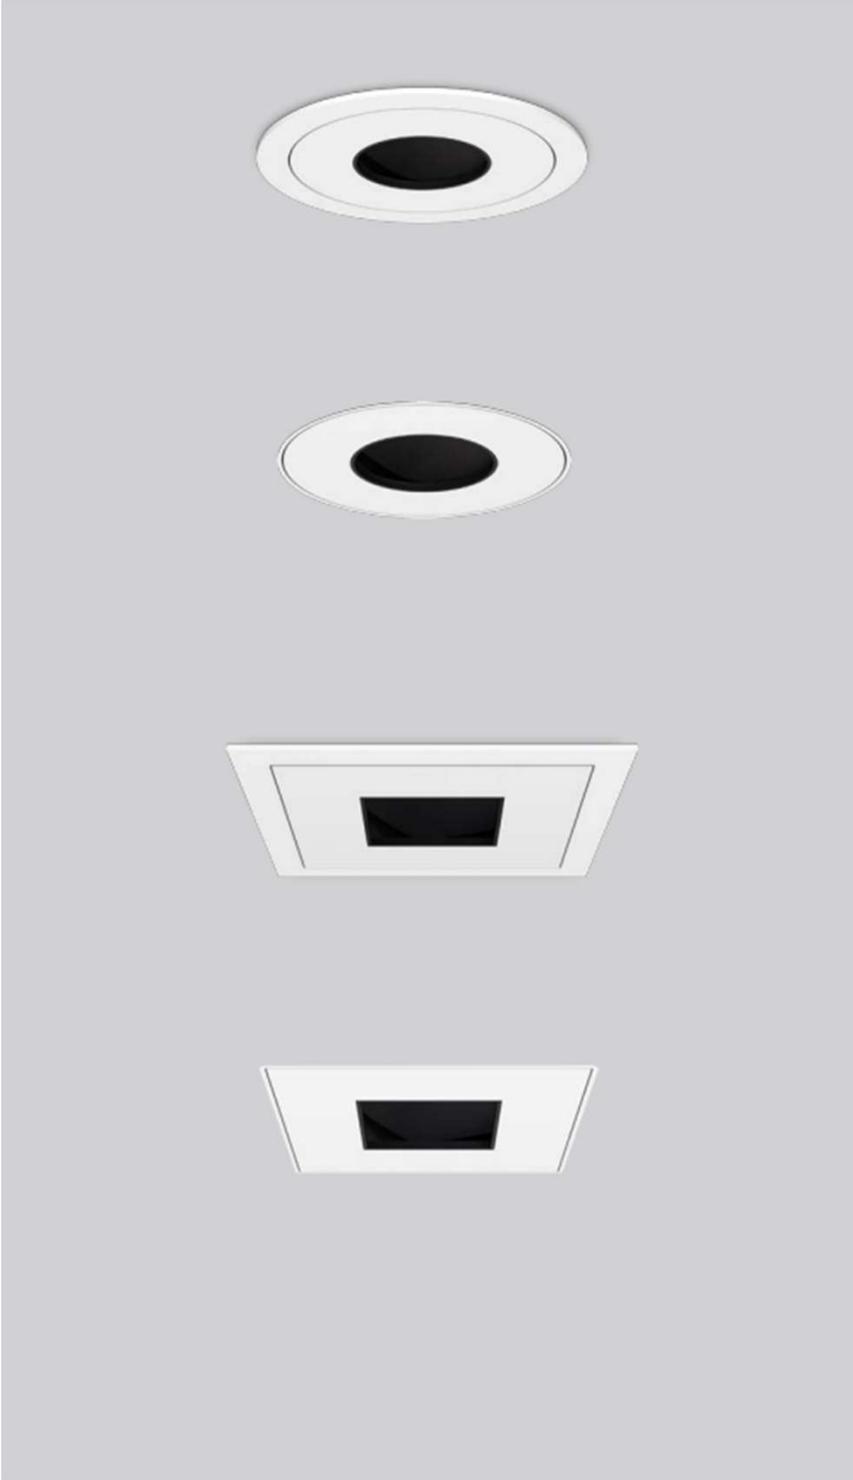

Specification

2700 K, 3000 K, 4000 K,
(Dim to warm) For 110
CRI ≥ 90
DALI, TRIAC, 1-10V

Types



Colours

Bezel : ● Black ○ White
Baffle : ● Black ○ White

Beam Angle

●
10°
● ● ● ●
15°/24°/36°/50° (Lens)

FILPOT SERIES



FILPOT SERIES 65 10W

Trim & Trimless Round Pinhole




LED Consumption	10W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




LED Consumption	10W
Current	250 (mA)
Lumen	913 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+




Dimmable




Accessories



Dimmable



Accessories



FILPOT SERIES 65 10W


Trim & Trimless Round Pinhole T/W




LED Consumption	10W
Current	250 (mA)
Lumen	680-882 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	2700K-6500K
CRI	90+



Dimmable




Accessories




LED Consumption	10W
Current	250 (mA)
Lumen	680-882 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	2700K-6500K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 85 12W


Trim & Trimless Round Pinhole




LED Consumption	12W
Current	350 (mA)
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable




Accessories



LED Consumption	12W
Current	350 (mA)
Lumen	1454 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 110 18W

Trim & Trimless Round Pinhole D/W




LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.154-LEE-15-DW

LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable



Accessories




LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.218A-LEE-15-DW


LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable



Accessories



FILPOT SERIES 110 18W

Trim & Trimless Square Pinhole D/W




LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.138-LEE-15-DW

LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable



Accessories





LED Consumption	18W
Current	500 (mA)
Lumen	1994 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	3000K
CRI	90+

Article number 2318.217F-LEE-15-DW


LED Consumption	16W
Current	450 (mA)
Lumen	34-1507 (lm)
Beam Angle	15°/24°/36°/50° (Lens)
CCT	1800-3000K
CRI	90+



Dimmable



Accessories



FILPOT SERIES

