




244



NORSE SERIES beam design is focusing on 60 degrees with an optical design of high effort illumination. Application for the NORSE SERIES is well suited to large spaces that are available in a variety of sizes in round and square trim options. This is ideal for shopping center's conference rooms and display walls as well as large living spaces.

Shape	0	0	\circ	\circ	\bigcirc
	Round Ø115	Round Ø140	Round Ø160	Round Ø198	Round Ø230
	Square □115	Square 140	Square □160	Square □195	
Mountings					
	Recessed Trim				
Light distributions					
	Downlight				

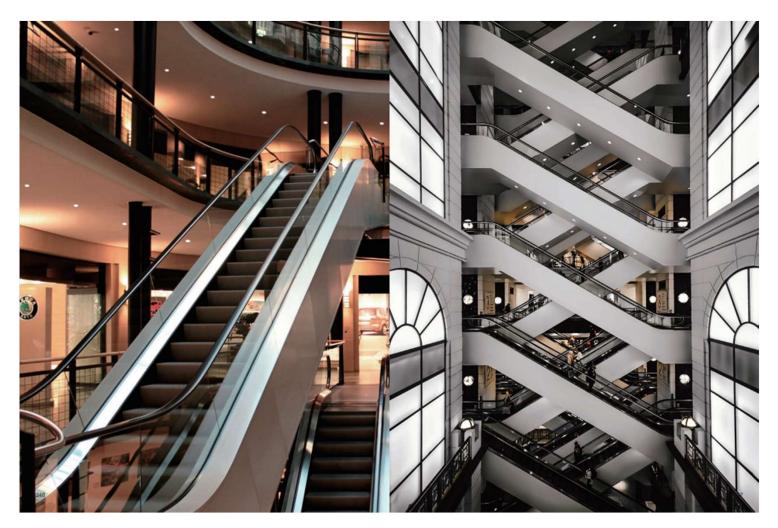








LED Consumption 250 (mA) Current 1055 (lm) Beam Angle 60° CCT 3000K CRI 90+

White

Baffle: Silver










LED Consumption 18W 500 (mA) Current 2108 (lm) Beam Angle 60° CCT 3000K CRI 90+

Colours : O White Baffle : O










LED Consumption 26W 700 (mA) Current 2803 (lm) Lumen Beam Angle 60° CCT 3000K CRI 90+

Colours : O White Baffle :













 LED Consumption
 37W

 Current
 1050 (mA)

 Lumen
 4186 (lm)

 Beam Angle
 60°


 CCT
 3000K

 CRI
 90+

Colours : O White

Baffle : O Silver









 LED Consumption
 45W

 Current
 1200 (mA)

 Lumen
 5010 (lim)

 Beam Angle
 60°

 CCT
 3000K

 CRI
 90+

Colours : O White

Baffle : O



