

FLUTE SERIES Exterior



TROJAN
INTELLIGENT LIGHTING SOLUTIONS






Description

- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- LED module design and with supper tempered galss, It has good visual comfortable light effect.
- High quality LED chips, Driver with 0-10V/DALI/programmed options, and with surge protection up to 20KV.
- LED module is used inside, Integrated electrical components which is easy to install and replace.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 hours.
- No photo-biological risk, (no risk linked to infrared, blue light and UV radiation) in accordance with EN 62471:2008.
- Street lighting control used with smart control technology. It can be compatible with remote management system.
- All external screws are made of 304 stainless steel.

Lamp power:	40-120W
Output lumen:	4000-12000LM
Number of size:	3 outgoing versions for selection
Color temperature option:	3000K/4000K
IP grade:	IP66
IK level:	IK09



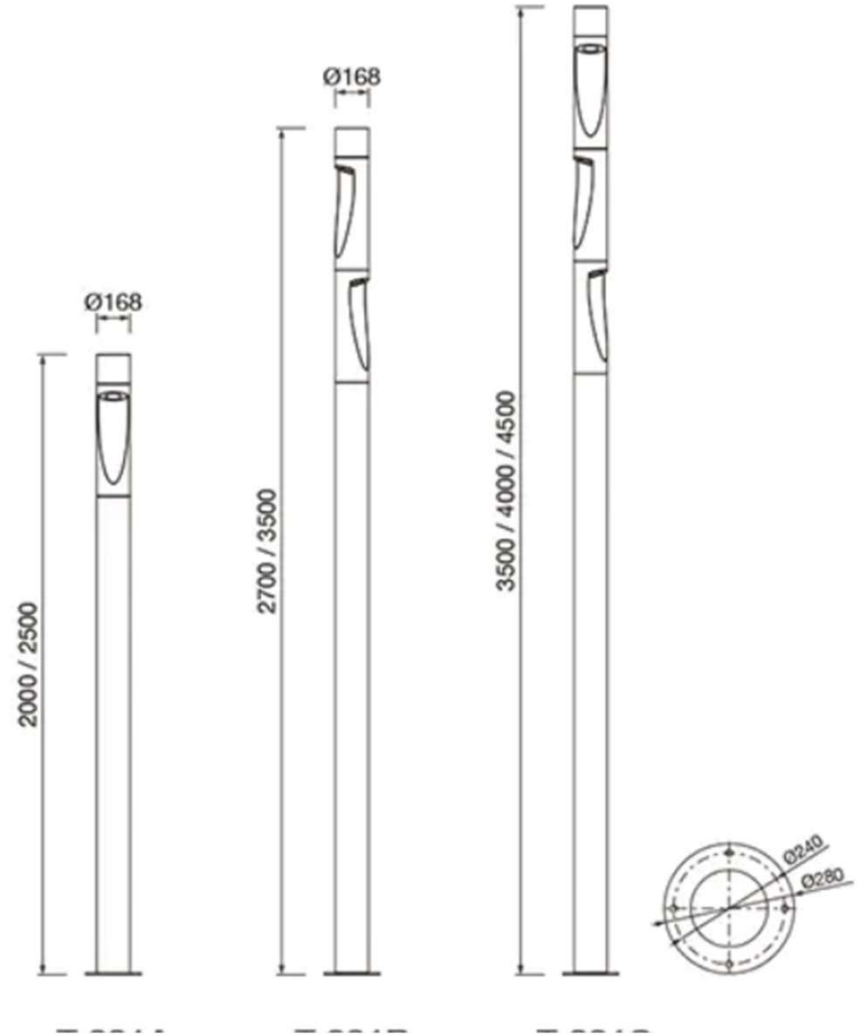



Description

- Aluminum die casting cover, extruded aluminum body, it can be cut different height.
- LED module design and with supper tempered galss, It has more comfortable light effect.
- Surface anti-ultraviolet pure polyester powder painting, Corrosion resistance can be more than 1000 h
- The maximum surface temperature of all accessible part under 50 degrees for safety and reliable.
- All external screws are made of 304 stainless steel, Additional optional base embedded parts.

Lamp power:	15W
Output Lumens:	1275LM
Color temperature options:	3000K/4000K
IP rating:	IP66
IK Level:	IK09
Installation method:	2 size versions

