



# COMET RANGE

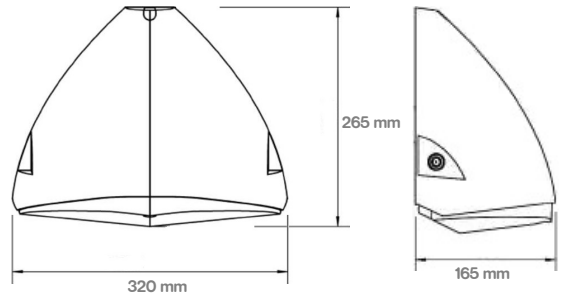

 IP65
  IK10
  L80/B10  
 50,000 hrs

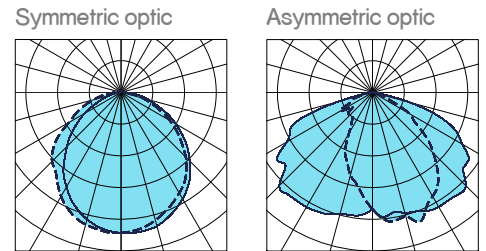

The Comet range incorporates a powder-coated cast aluminium wall mount body and polycarbonate diffuser which is available with a symmetrical optic or an asymmetrical optic.

Supplied as standard with switchable CCT LED array, you can choose between 3000K and 4000K, and switchable power output from 13W to 28W. The emergency range of the Comet are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The Comet range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Optic	Power W	Output lm	CCT K	Length mm	Height mm	Depth mm
TLCOM/SY/CCT	Symmetrical	13 - 28	1700 - 3500	3000/4000	320	265	165
TLCOM/AS/CCT	Aymmetrical						

DD = DALI Dimmable  
 E = Emergency  
 BL = Black finish

SD = SwitchDim  
 ST = Self Test Emergency  
 GR = Grey finish

MD = Mymesh Dim  
 ME = Mymesh Emergency  
 PC = Photocell

CD = Casambi Dim  
 SL\*\* = Slave  
 MW = Microwave sensor