



H? PPMU RANGE

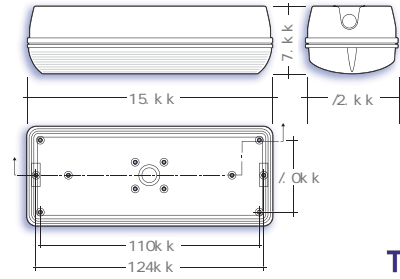

powered by
TRIDONIC



- IP66
- IK10
- L80/B10
72,000 hrs

The arrow range incorporates impact resistant polycarbonate base and diffuser along with Tridonic high-performance LED board and driver making the bulkhead a highly efficient lighting fixture that can meet even the most rigorous energy-saving requirements. It is ideal for commercial and domestic use and has been designed to be both economical and efficient.

Supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps, the arrow is available with white or black base and either cool or warm white colour temperature and along with a range of control options including corridor function. The emergency range of the arrow emergency versions are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The arrow range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

DU f HwXY	7U f [] b[At K	7U f [] b[BAf K	8fU h] cb fg	7Y `g @] :YDC(_]	K Y] [h _]
H@>5F # A)" +	\$" &	'	"" & "" ,5\	\$" ,
H@>5F # Gf)" (\$""	'	"" & "" ,5\	\$" ,
H@>5F # G)" (\$""	'	"" & "" ,5\	\$" ,
H@>5F # A 9)" *	\$")	'	"" & "" ,5\	\$" ,

f:c`ck] b[] h] U` WU f [ZiYi b] h] ` ghbX - \$i cZ] h] cdfU h] cbU ` `] ZY] b] b] bXVmacXY

- K f; tQu gaf cbtK _gr_ gcbt
QJ ((f; tQj_tcl
- QRf; tQcjdRcqrIcK cpecl awf
MNf; tMh_jtBgtbqcp
- B? f; tB? J G? bbpcqg_` jcl
ADf; tAjc_fDpcxl cjtBgtbqcp
- K Cf; tK vk cqf tCk cpecl awf
Jl f; tJ cecl btl g

