



# TROJAN

INTELLIGENT LIGHTING SOLUTIONS

## GALLARIA



Material: Aluminum die casting heatsink & gearbox with powder coating finish acrylic trim.

Unique square shape, outstanding lighting quality with various beam angle to apply different diffusers for different environment.

With wide variety of lighting type, track light, recessed down light, surface mounted light and wall light.




# TROJAN

INTELLIGENT LIGHTING SOLUTIONS

## GALLARIA

Sharing the same heatsink & optical mechanism.

---

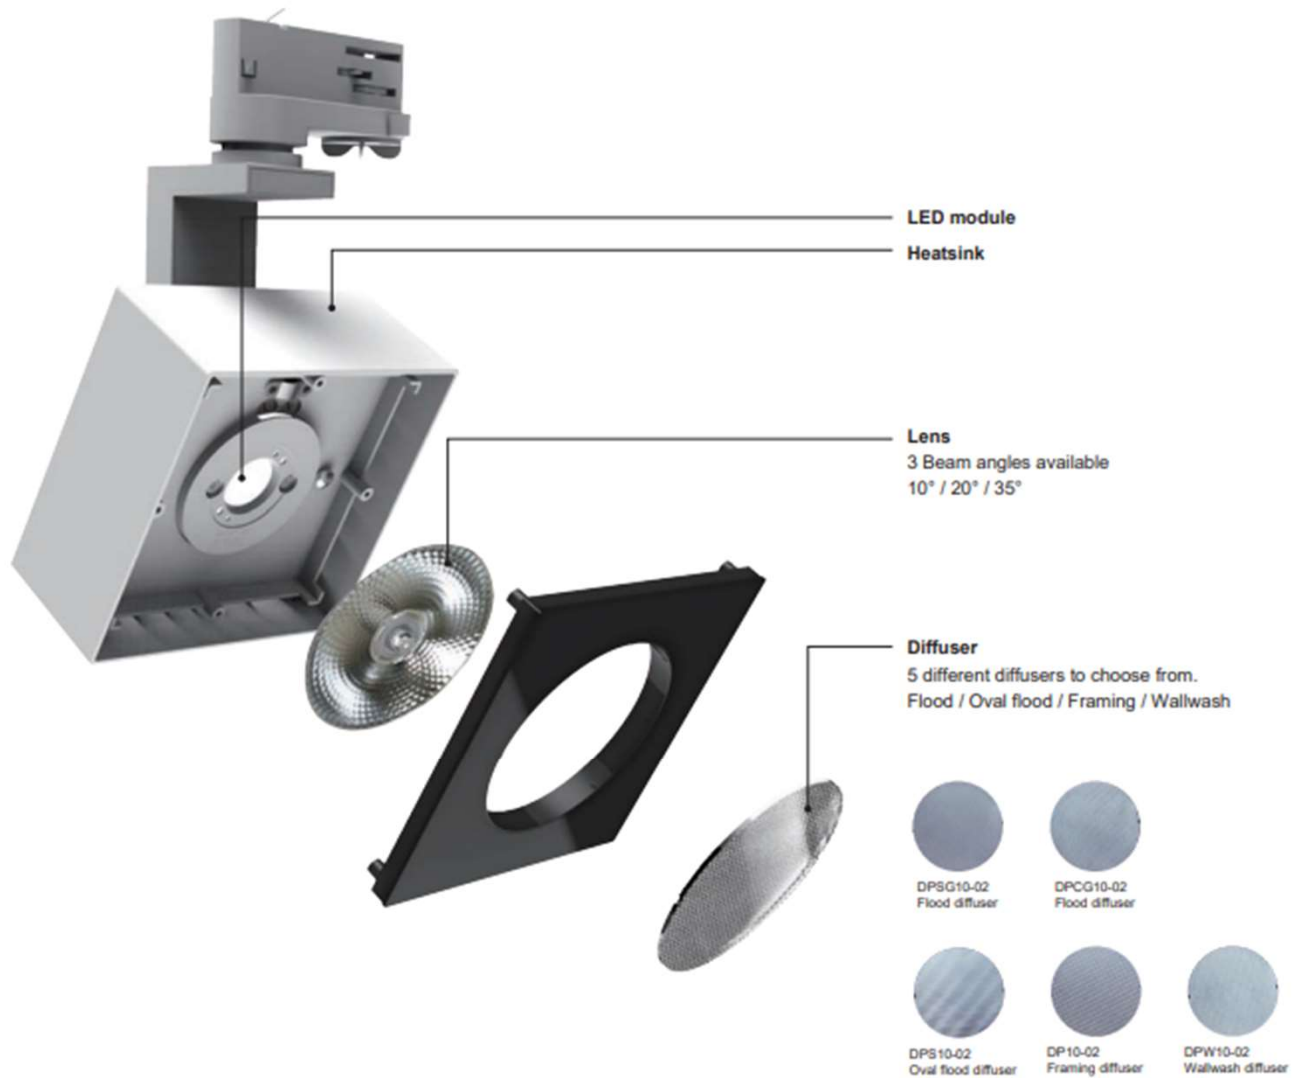



# TROJAN


INTELLIGENT LIGHTING SOLUTIONS

## GALLERIA

### Lens


#### Spot (Angle 10° / 20° / 35°)

Round narrow beam is suitable for object lighting.

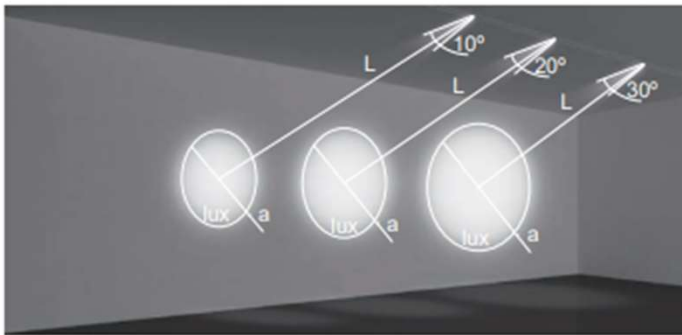


	L	a	lux
10°	1m	Ø22cm	26174 lx
	2m	Ø44cm	6544 lx
	2.5m	Ø55cm	4188 lx
20°	1m	Ø36cm	10857 lx
	2m	Ø72cm	2714 lx
	2.5m	Ø90cm	1737 lx
35°	1m	Ø63cm	3986 lx
	2m	Ø126cm	997 lx
	2.5m	Ø158cm	638 lx

### Diffuser



#### Flood

Wider beam diffuser to focus on larger objects.

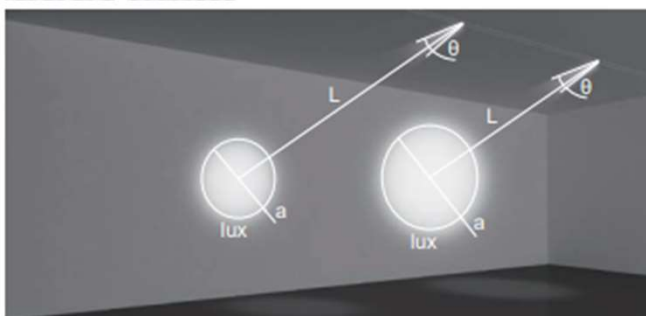

	DPSG10-02				DPCG10-02			
	L	a	lux	θ	a	lux	θ	
10°	1m	Ø47cm	5795 lx	26°	Ø58cm	3943 lx	32°	
	2m	Ø94cm	1449 lx		Ø116cm	986 lx		
	2.5m	Ø118cm	927 lx		Ø145cm	631 lx		
20°	1m	Ø59cm	2404 lx	33°	Ø72cm	1636 lx	40°	
	2m	Ø118cm	601 lx		Ø144cm	409 lx		
	2.5m	Ø148cm	385 lx		Ø180cm	262 lx		
35°	1m	Ø88cm	883 lx	49°	Ø99cm	601 lx	55°	
	2m	Ø176cm	221 lx		Ø198cm	150 lx		
	2.5m	Ø220cm	141 lx		Ø248cm	96 lx		




# TROJAN

INTELLIGENT LIGHTING SOLUTIONS


## GALLERIA




**Oval Flood**  
Oval flood beam suitable for wall wash.

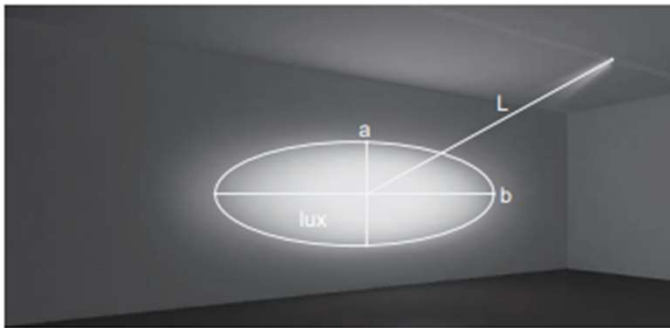


DPS10-02	L	a/b	lux
10°	1m	23cm / 47cm	10917 lx
	2m	46cm / 94cm	2729 lx
	2.5m	58cm / 118cm	1747 lx
20°	1m	38cm / 61cm	4528 lx
	2m	76cm / 122cm	1132 lx
	2.5m	95cm / 153cm	724 lx
35°	1m	65cm / 88cm	1663 lx
	2m	130cm / 176cm	416 lx
	2.5m	163cm / 220cm	266 lx




**Framing**  
Square diffuser to focus on artwork in the gallery.

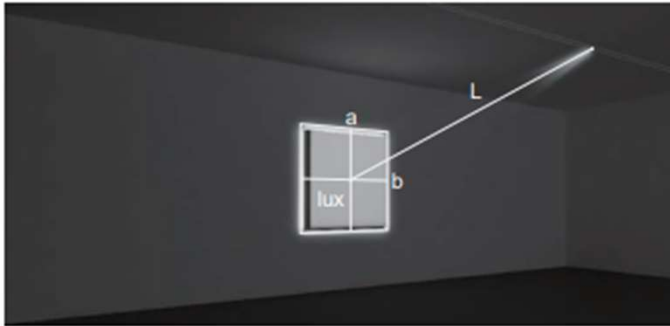

DP10-02	L	a/b	lux
10°	1m	67cm / 67cm	3673 lx
	2m	134cm / 134cm	918 lx
	2.5m	168cm / 168cm	588 lx
20°	1m	81cm / 81cm	1524 lx
	2m	162cm / 162cm	381 lx
	2.5m	203cm / 203cm	244 lx
35°	1m	108cm / 108cm	559 lx
	2m	216cm / 216cm	140 lx
	2.5m	270cm / 270cm	89 lx




**Wallwash**  
Wall wash provides even spread on the wall.

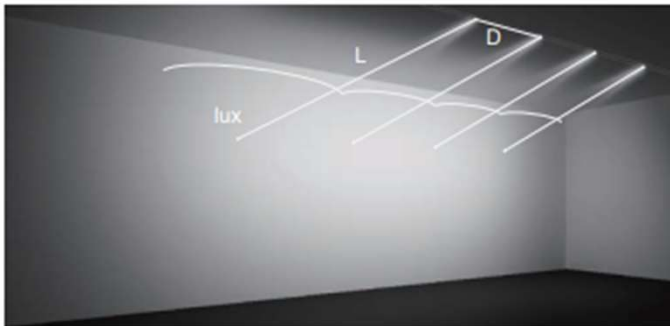

DPW10-02	L	D	lux
10°	1m	40cm	2502 lx
	2m	79cm	626 lx
	2.5m	99cm	400 lx
20°	1m	47cm	1038 lx
	2m	94cm	260 lx
	2.5m	118cm	166 lx
35°	1m	61cm	381 lx
	2m	121cm	95 lx
	2.5m	152cm	61 lx

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

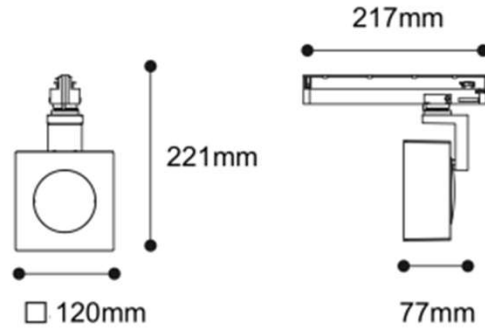

Colour  
○



IP20

90°


355°




powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLACO/G120/26/90/4000K/35D/WH	26	2811	108	4000	90


Part Code Options	Dimming
TLACO/G120/26/90/4000K/35D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

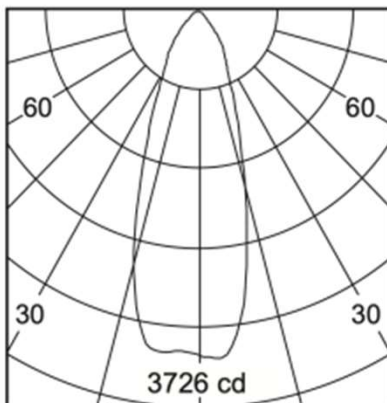

### Accessories




Diffuser  
5 different diffusers to choose from.  
Flood / Oval flood / Framing / Wallwash



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

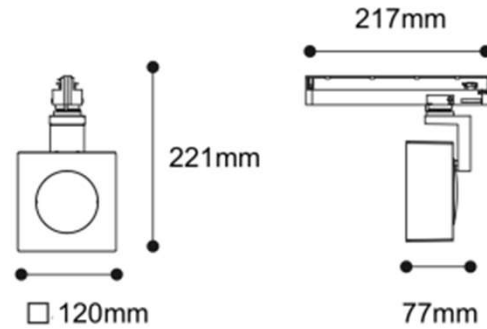

Colour



IP 20

90°


355°




powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/2700K/10D/BH	26	2563	99	2700	90

Part Code Options	Dimming
TLGAL/G120/26/90/2700K/10D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

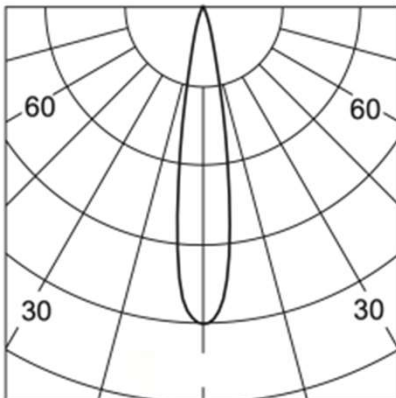


### Accessories

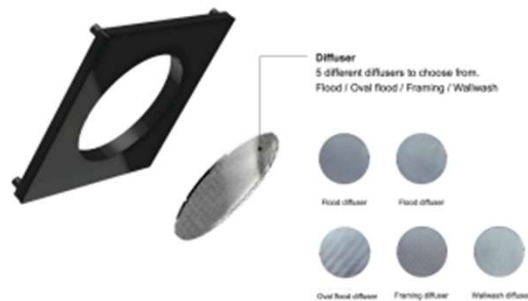

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

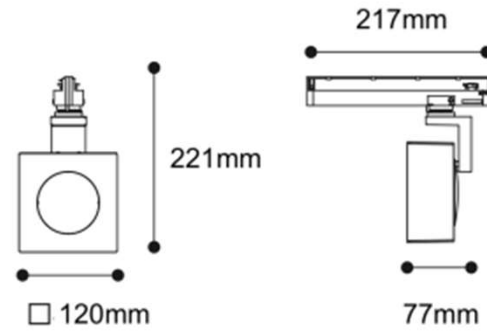

Colour  
○



IP20

90°


355°




powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/2700K/10D/WH	26	2563	99	2700	90

Part Code Options	Dimming
TLGAL/G120/26/90/2700K/10D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

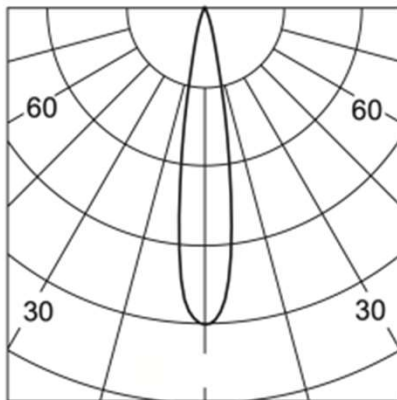


### Accessories

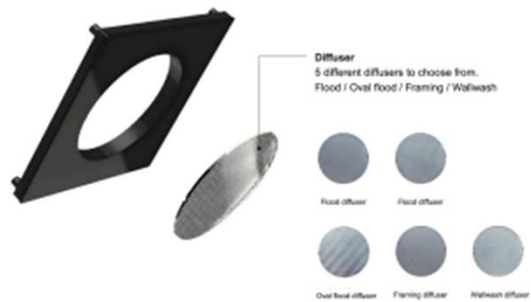

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

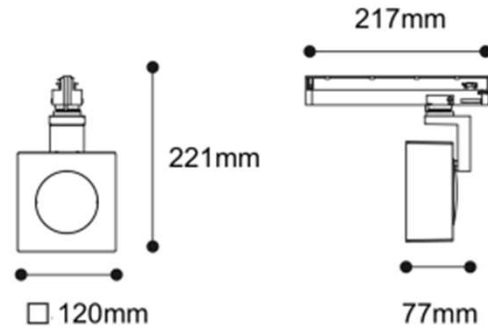

Colour



IP20

90°

355°




powered by


**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/2700K/20D/BH	26	2563	99	2700	90

Part Code Options	Dimming
TLGAL/G120/26/90/2700K/20D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

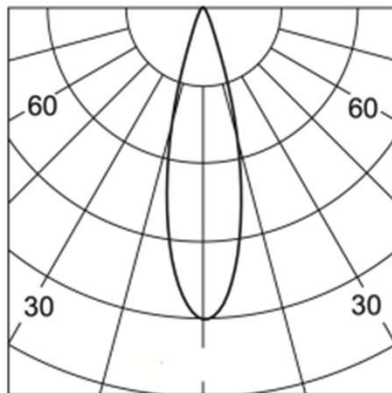


### Accessories

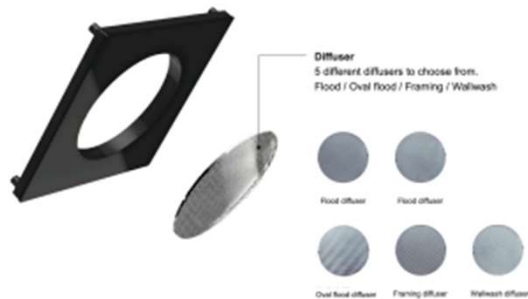



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

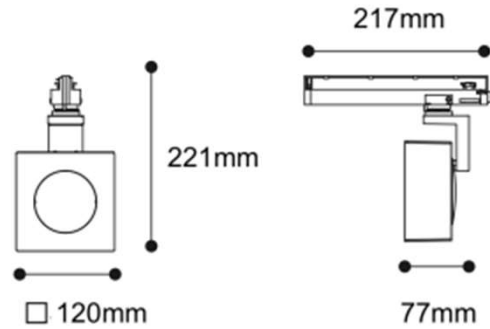

Colour



IP20

90°


355°




powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/2700K/20D/WH	26	2563	99	2700	90

Part Code Options	Dimming
TLGAL/G120/26/90/2700K/20D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

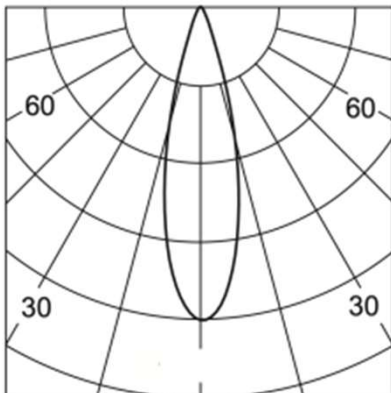


### Accessories

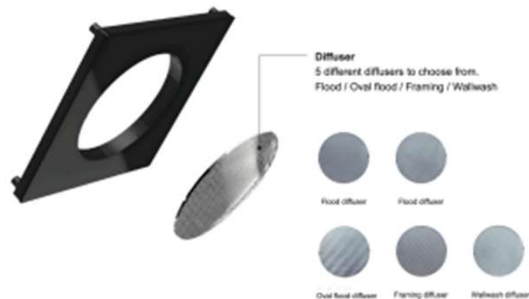

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

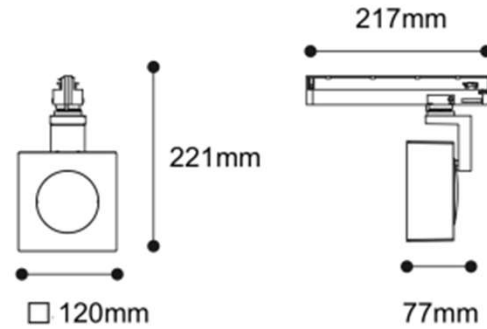

Colour



IP20

90°

355°




powered by

**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/2700K/35D/BH	26	2563	99	2700	90

Part Code Options	Dimming
TLGAL/G120/26/90/2700K/35D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

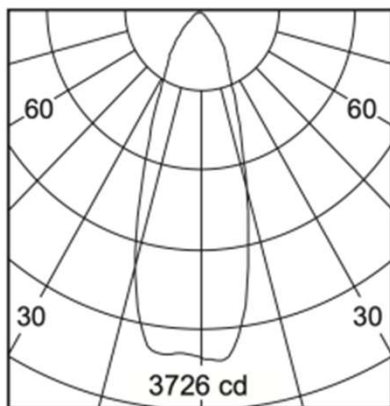


### Accessories



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

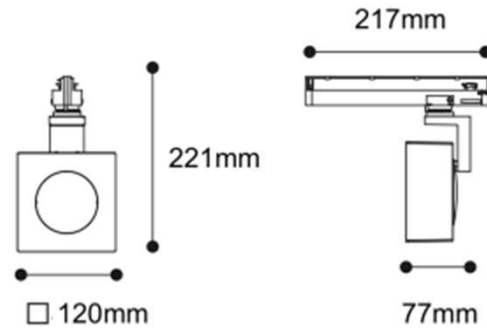

Colour



IP20

90°

355°




0.9 KG

powered by


**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/2700K/35D/WH	26	2563	99	2700	90


Part Code Options	Dimming
TLGAL/G120/26/90/2700K/35D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

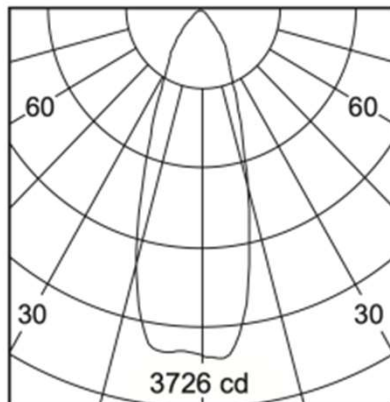

### Accessories




**Diffuser**  
5 different diffusers to choose from.  
Flood / Oval flood / Framing / Wallwash



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

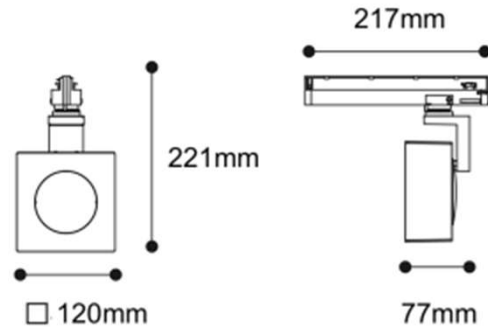


Colour 

IP20
90°
355°
 0.9 KG


powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/3000K/10D/BH	26	2670	103	3000	90

Part Code Options	Dimming
TLGAL/G120/26/90/3000K/10D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

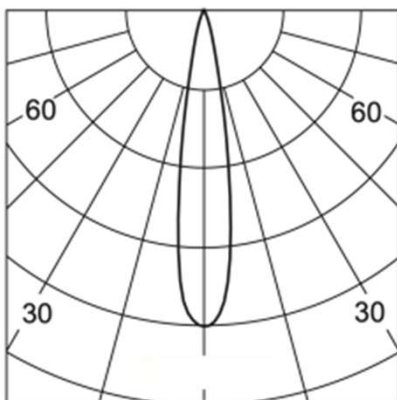


### Accessories

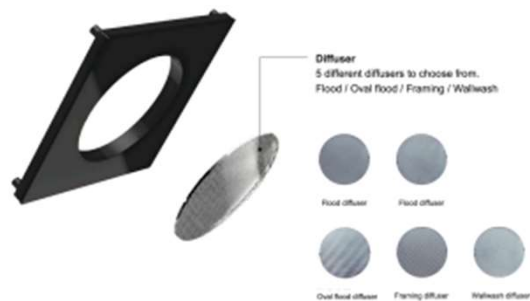

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

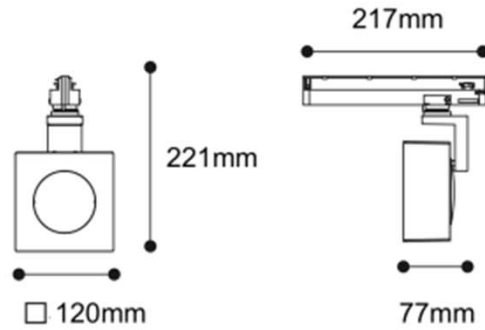

Colour



IP20

90°

355°




powered by

**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/3000K/10D/WH	26	2670	103	3000	90

Part Code Options	Dimming
TLGAL/G120/26/90/3000K/10D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

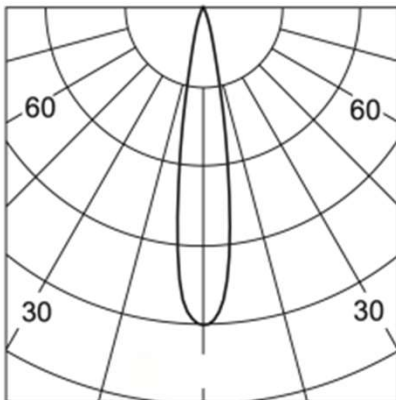


### Accessories



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

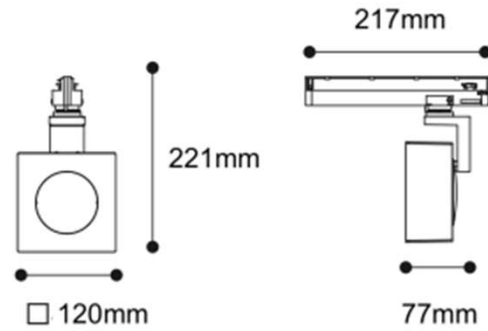


Colour  
IP20
90°
355°
0.9 KG


powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/3000K/20D/BH	26	2670	103	3000	90

Part Code Options	Dimming
TLGAL/G120/26/90/3000K/20D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

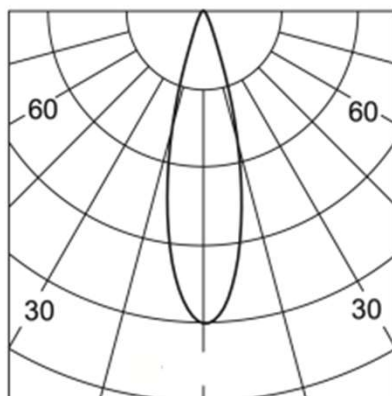


### Accessories

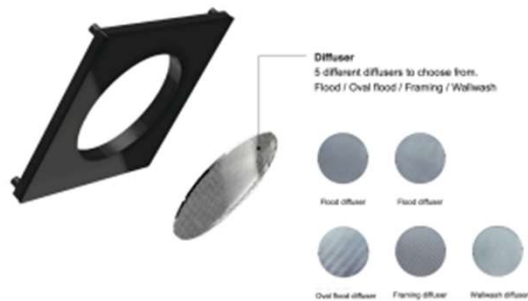

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

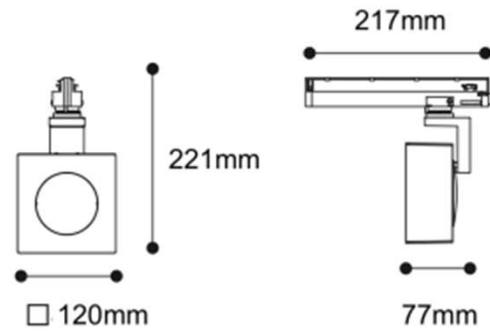


Colour IP20


powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/3000K/20D/WH	26	2670	103	3000	90

Part Code Options	Dimming
TLGAL/G120/26/90/3000K/20D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

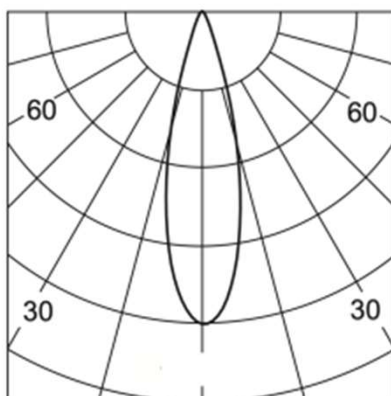


### Accessories

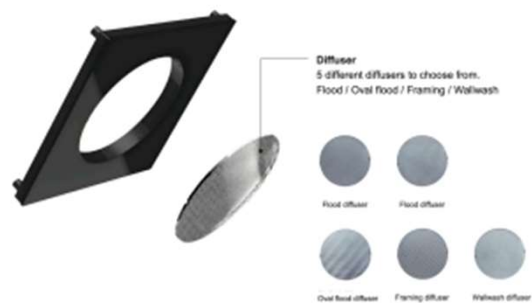

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

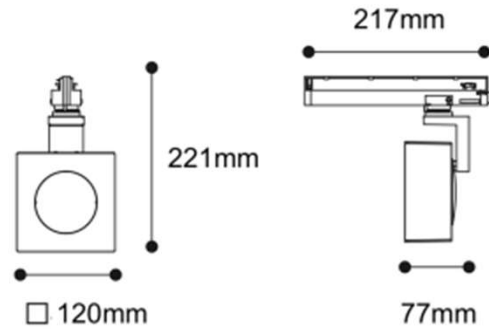


Colour 


IP20
90°
355°
 0.9 KG
powered by **TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/3000K/35D/BH	26	2670	103	3000	90

Part Code Options	Dimming
TLGAL/G120/26/90/3000K/35D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

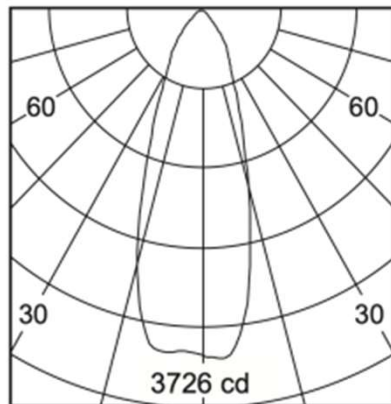


### Accessories

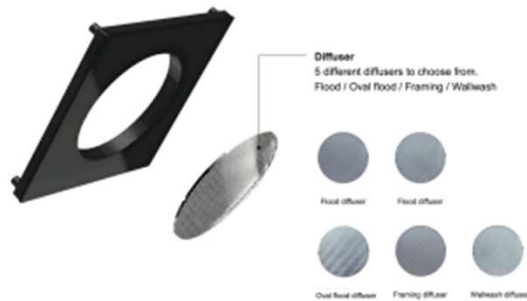



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

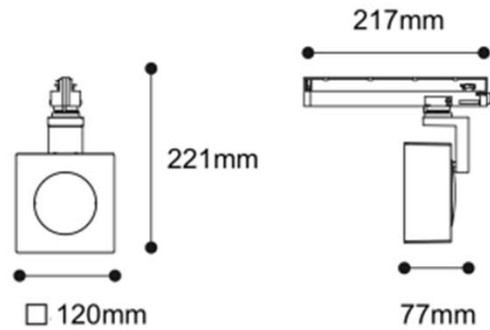

Colour



IP20

90°

355°




powered by

**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/3000K/35D/WH	26	2670	103	3000	90

Part Code Options	Dimming
TLGAL/G120/26/90/3000K/35D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

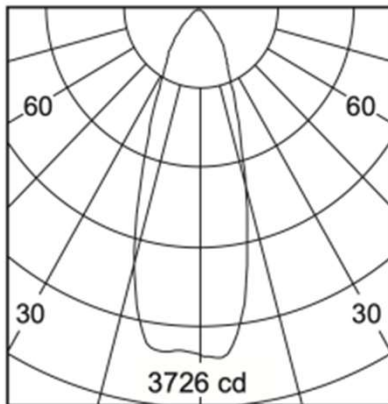


### Accessories



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

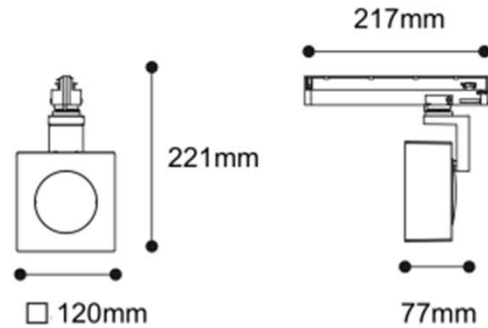

Colour



IP20

90°

355°




powered by


**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/4000K/10D/BH	26	2811	108	4000	90

Part Code Options	Dimming
TLGAL/G120/26/90/4000K/10D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

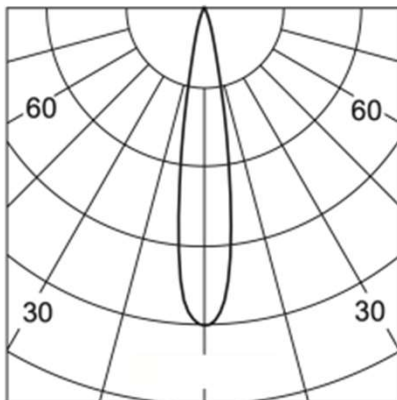


### Accessories

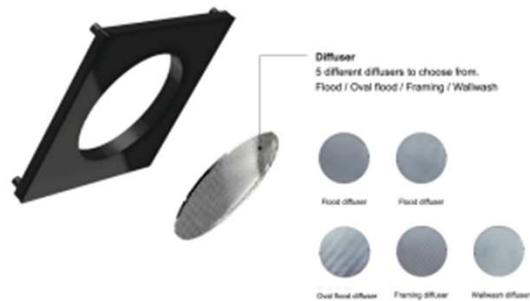

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

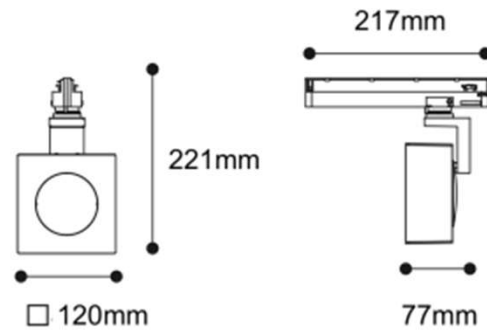

IP20

90°

355°




powered by

**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/4000K/10D/WH	26	2811	108	4000	90


Part Code Options	Dimming
TLGAL/G120/26/90/4000K/10D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

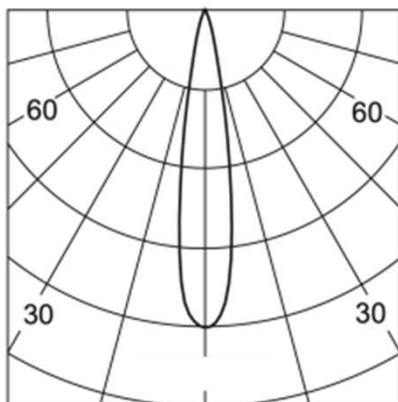

### Accessories




Diffuser  
5 different diffusers to choose from.  
Flood / Oval flood / Framing / Washwash



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

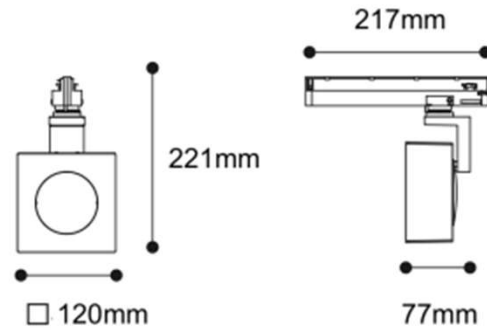

Colour



IP20

90°

355°




0.9 KG

powered by


**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/4000K/24D/BH	26	2811	108	4000	90


Part Code Options	Dimming
TLGAL/G120/26/90/4000K/24D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

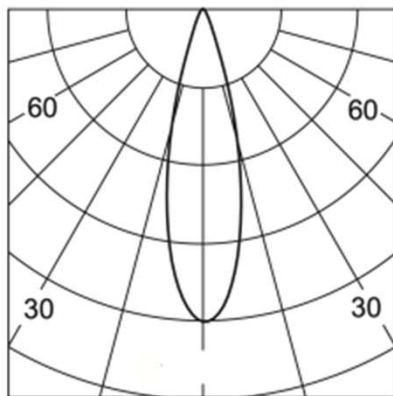

### Accessories




Diffuser  
5 different diffusers to choose from.  
Flood / Oval flood / Framing / Washwash



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

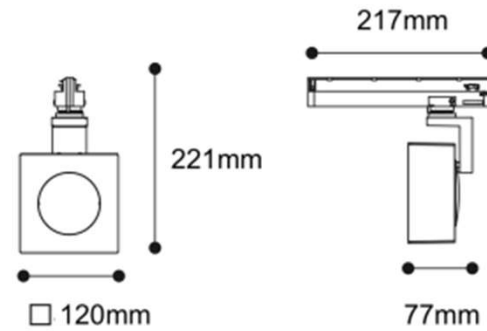

Colour



IP20

90°

355°




0.9 KG

powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/4000K/24D/WH	26	2811	108	4000	90

Part Code Options	Dimming
TLGAL/G120/26/90/4000K/24D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

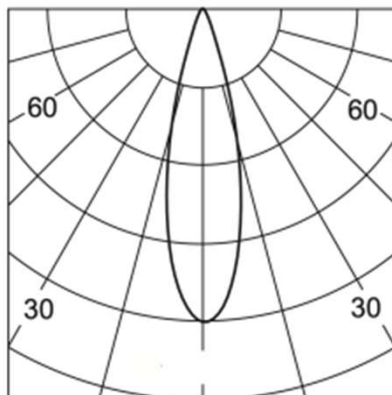


### Accessories



# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

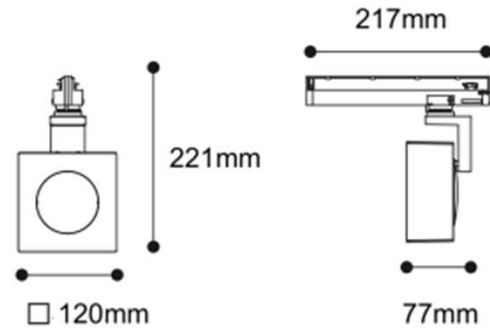


Colour 


IP20
90°
355°
 0.9 KG
powered by **TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/4000K/35D/BH	26	2811	108	4000	90

Part Code Options	Dimming
TLGAL/G120/26/90/4000K/35D/BH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

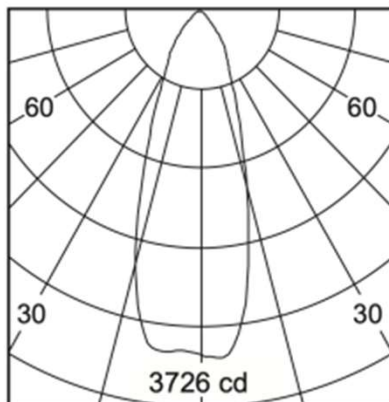


### Accessories

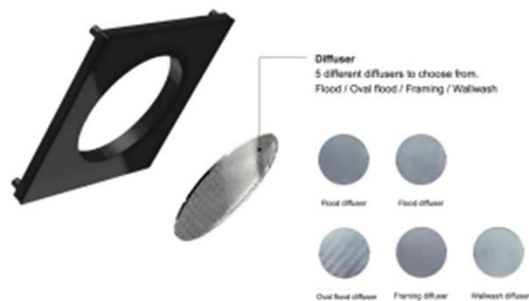

# GALLERIA

## GALLERIA 120 TRACK SPOTLIGHT

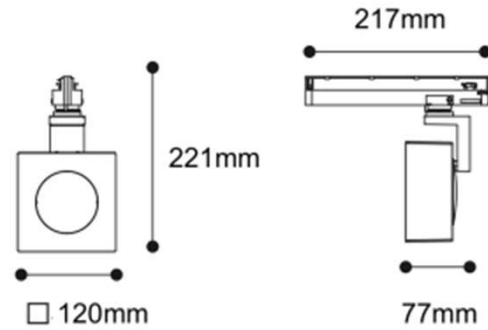

Colour  
○



IP20

90°


355°



powered by  
**TRIDONIC**

Basic Part Code	Power (W)	Output (lm)	Efficacy lm/W	CCT (K)	CRI (Ra)
TLGAL/G120/26/90/4000K/35D/WH	26	2811	108	4000	90

Part Code Options	Dimming
TLGAL/G120/26/90/4000K/35D/WH	/DD = DALI
	/SD = Switch Dim
	/MD = Mymesh
	/CD = Casambi

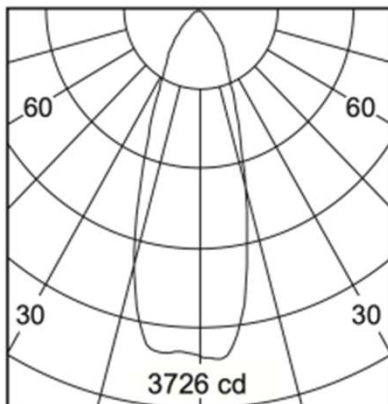

### Accessories





# TROJAN

INTELLIGENT LIGHTING SOLUTIONS

## GALLERIA



### Accessories

---



DPSG10-02  
Flood diffuser



DPCG10-02  
Flood diffuser



DPS10-02  
Oval flood diffuser



DP10-02  
Framing diffuser



DPW10-02  
Wallwash diffuser