


# WILCOVE RANGE



IP44

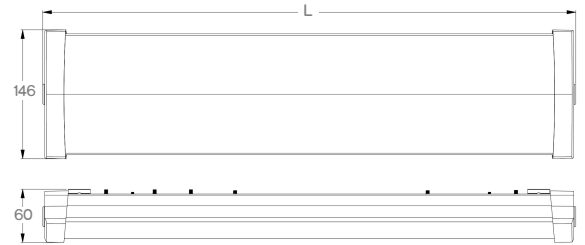


IK04



L80/B10  
100,000 hrs



TP(a)



The Wilcove range presents a stylish solution that meets DHSS guidelines. The end caps are firmly secured with a stainless steel screw, which can be replaced with a tamper-proof screw to prevent any unauthorized access. Cable entry side and rear.

The linear range is available in 3000K and 4000K colour temperatures, providing flexibility in achieving the desired lighting ambiance. Fitted with a low glare TP(a) diffuser and the use of optimised thermal management technology results in an expected lifespan of 100,000 hours (L80) with a colour stability within 3 MacAdam steps.

The Wilcove range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Length mm	Width mm	Depth mm	Efficacy lm/W	Weight kg
TLWIL/6/2000/4K	13	1897	622	146	60	149	1.9
TLWIL/6/2500/4K	17	2594	622	146	60	150	1.9
TLWIL/6/3000/4K	24	3262	622	146	60	139	1.9
TLWIL/12/4000/4K	24	3794	1182	146	60	155	3.0
TLWIL/12/5000/4K	34	5189	1182	146	60	152	3.0
TLWIL/12/6000/4K	44	6523	1182	146	60	147	3.0
TLWIL/15/4000/4K	30	4742	1462	146	60	159	3.8
TLWIL/15/6000/4K	42	6486	1462	146	60	155	3.8
TLWIL/15/8000/4K	54	8154	1462	146	60	150	3.8

DD = DALI Dimmable  
E = Emergency  
3K = 3000K CCT

SD = SwitchDim  
ST = Self Test Emergency

MD = Mymesh Dim  
ME = Mymesh Emergency

CD = Casambi Dim  
SL\*\* = Slave