

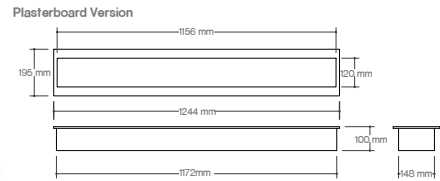
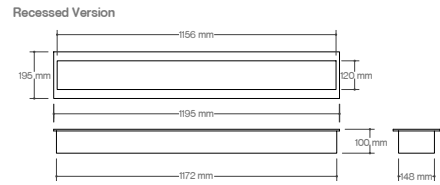


WILTON RANGE

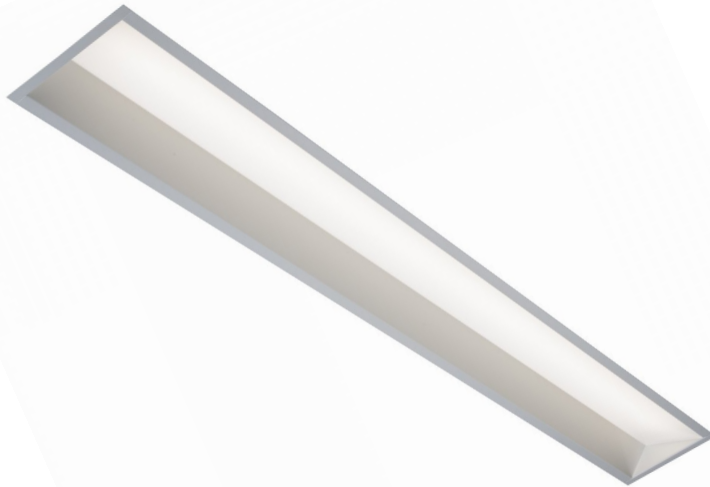

powered by
TRIDONIC



The Wilton range incorporates a powder-coated steel body and acrylic opal diffuser which produces a homogeneous illumination. Supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps, the Wilton is available in 4000K cool white colour temperature as standard and 3000K and 5000K colour temperatures are available. The emergency range of the Wilton are fitted with the latest lithium iron phosphate LiFePO₄ battery technology, which has a 3-year battery warranty.

The Wilton range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Length mm	Width mm	CCT K	CRI Ra	Weight kg
TLWILT/3000/4K	24	2878	1195	105	4000	80	8.5
TLWILT/4000/4K	34	3986	1195	105	4000	80	9.2

DD = DALI Dimmable

SD = SwitchDim

MD = Mymesh Dim

CD = Casambi Dim

E = Emergency

ST = Self Test Emergency

ME = Mymesh Emergency

SL** = Slave

3K = 3000K CCT

4K = 4000K CCT

5K = 5000K CCT

TW = Tunable White

R = Recessed Lay In

PB = Plasterboard