

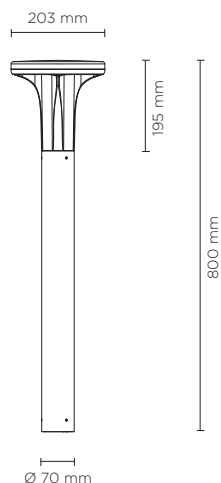




602202

## ALDER 800

Designed by  
NAVA + AROSIO

800mm height bollard, for outdoor installation, 360° light distribution, phospho-chromatised and polyester powder coated die-cast aluminum head and extruded pole. Tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 24 x CREE "XH-G" LED. IP66 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
mid-power led	 radial 360°	1.600	80.00
<b>4000°K neutral-white</b>			
mid-power led	 radial 360°	1.650	82.50
<b>2700°K CCT</b> available on request			

### Finish color options:

 Textured Grey  
RAL 9006

 Anthracite Grey  
RAL 7016

 Matt Black  
(on request)

### Technical features



### Available on request



### Technical data

Wattage	20 WATT
IP Rating	IP66
IK Rating	IK09
Material	High corrosion resistance extruded copper-free aluminum head and extruded pole
Coating	Polyester powder coating with phosphochromating pre-finish
Light Source	NR. 24 x CREE "XH-G" LED
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	PG11
Power cable	1,5 meters power cable included
Gross weight	4,30 Kg



AC065  
ANCHORAGE UNIT  
FOR ALDER SERIES

