









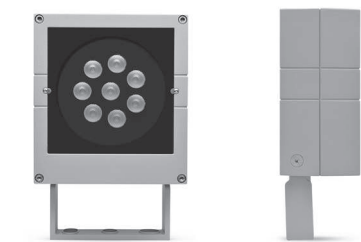



101008

CASE MAXI

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 8 CREE XP-G3 LED. IP65 rating.



light source*	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		10°	1.152	96.00
high-power led		30°	1.095	91.25
high-power led		45°	1.040	86.67
4000°K neutral-white				
high-power led		10°	1.200	100.00
high-power led		30°	1.140	95.00
high-power led		45°	1.083	90.25
2700°K CCT available on request				

Finish color options:		
 Textured Grey RAL 9006	 Anthracite Grey RAL 7016	 Matt Black (on request)

Technical features



Available on request



Technical data

Wattage	12 WATT
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 8 x 1.5W CREE “XP-G3” LED
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	1 mt. neoprene power cable included
Gross weight	5,00 Kg

SHORT FIXING BRACKET



MEDIUM FIXING BRACKET



BOTH included In the standard package

101009 - EXTENDED FIXING BRACKET OPTION

