




602301

COINY BOLLARD

Projector for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS "EDC 38C" COB LED. IP66 rating.



MAX NR. 2 FIXTURES PER PIPE

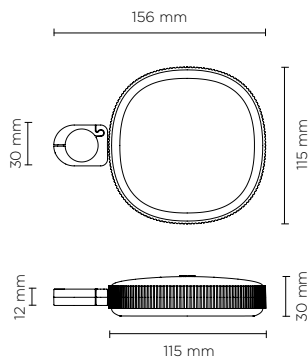

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	18°	400	50.00
cob led	36°	390	48.75
cob led	60°	375	46.88
4000°K neutral-white			
cob led	18°	410	51.25
cob led	36°	400	50.00
cob led	60°	385	48.13

2700°K CCT available on request

Finish color options:

Textured Grey
RAL 9006

Anthracite Grey
RAL 7016

Matt Black
(on request)

Technical features

IP66

IK08

CE

5
YEARS

⏏

Technical data

Wattage	8 WATT
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x LUMENS "EDC 38C" COB LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	1,20 Kg





AC112**PIPE L 500 mm + BASE**

Extension pipe length 500 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.

**AC113****PIPE L 1000 mm + BASE**

Extension pipe length 1.000 mm made in anodized aluminum with phospho-chromatised and polyester powder coating; complete with fixing base.

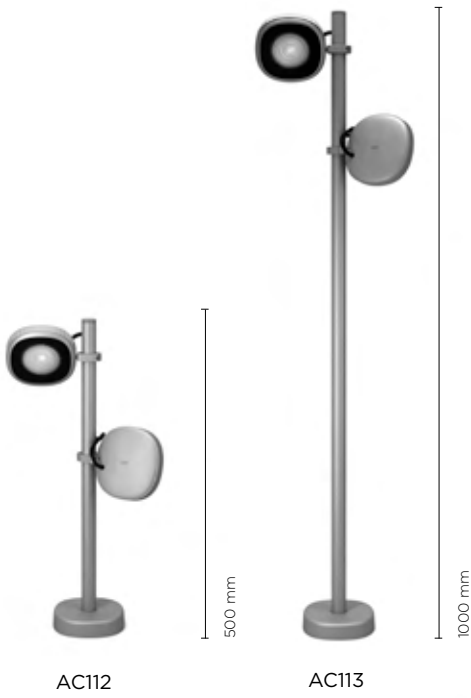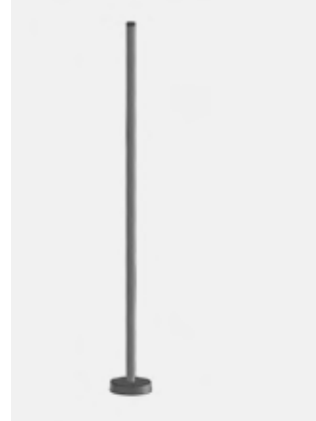

OPTIONAL

AC044
SPIKE



AC111
VISOR



AC0110
HONEYCOMB LOUVER

