




701201

# CYLINDER MICRO COB

Surface mounted luminaire for outdoor ceiling installation. Phospho-chromatised and polyester powder coated extruded copper-free aluminium body, tempered safety glass, moulded silicone gaskets, with screws in stainless steel. Built-in LED driver, with 1 COB CREE “CXB 1304” LED. IP66 rating.

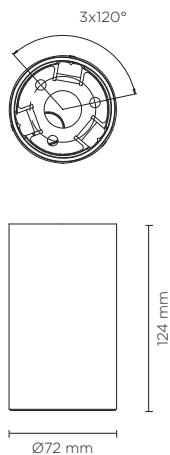

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
cob led	18°	620	103.33
cob led	36°	600	100.00
cob led	60°	580	96.67
<b>4000°K neutral-white</b>			
cob led	18°	640	106.67
cob led	36°	620	103.33
cob led	60°	600	100.00
<b>2700°K CCT available on request</b>			

<b>Finish color options:</b>		
 Textured Grey RAL 9006	 Anthracite Grey RAL 7016	 Matt Black (on request)


Technical features

IP 66

IK 09

CE

5 YEARS



Available on request



<b>Technical data</b>	
Wattage	6 WATT
IP Rating	IP66
IK Rating	IK09
Material	Phospho-chromatised and polyester powder coated extruded copper-free aluminium
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	1 x COB CREE “CXB 1304” LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	1 mt. power cable included
Gross weight	1,00 Kg

AC090  
HONEYCOMB LOUVER

