




401710

ECLIPSE LINEAR 600

Designed by
PAOLO VILLA

Rectangular wall surface-mounted luminaire creating a **diffused and discrete light through the fixture perimeter** on the wall. Fixture for outdoor installation on a wall. Phosphochromatised and polyester powder coated die-cast copper-free aluminium body, frosted polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with low-power CREE LED. IP65 rating.

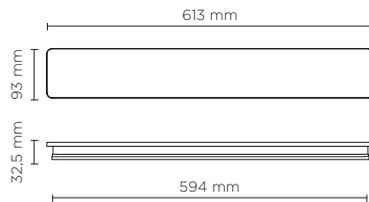

| light source* | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|---------------|--------------------|-------------------|------------------------|
|---------------|--------------------|-------------------|------------------------|

3000°K warm-white

| | | | |
|---------------|--------|-----|-------|
| low power led | ■ 360° | 781 | 32.54 |
|---------------|--------|-----|-------|

* Other light colors available on request: Neutral-white

Finish color options:

| | | |
|-----------------------------|-------------------------------|------------------------------|
| ■ Textured Grey RAL 9006 | ■ Anthracite Grey RAL 7016 | ■ Matt Black (on request) |
|-----------------------------|-------------------------------|------------------------------|

Technical features



Technical data

| | |
|----------------|--|
| Wattage | 24 WATT |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Material | High corrosion resistance die-cast copper-free aluminum body |
| Coating | Polyester powder coating with phosphochromating pre-finish |
| Light source | Low power CREE LED |
| Screws | Stainless steel |
| Transformer | Electronic power supply 220/240V 50/60Hz built-in |
| Gasket | Silicone rubber |
| Rubber grommet | M16 Rutaseal® in EPDM |
| Diffuser | Polycarbonate |
| Gross weight | 2,00 Kg |

