




805009-805011


## FLASH POLE MEGA

Round pole-mounted floodlight for outdoor installation on a pole diam. 60 mm or 76 mm. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Clamp for pole diam 60 mm or 76 mm included. Built-in LED driver 220-240V 50-60Hz, with 15 CREE XP-G2 high-power LED. IP65 rating.

805009

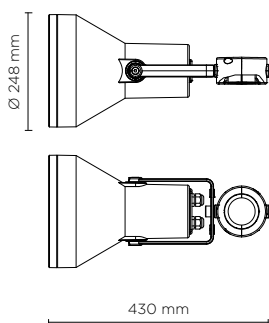

805011

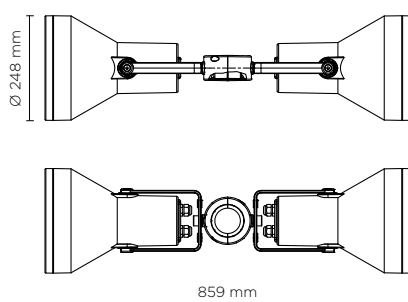

### Technical features










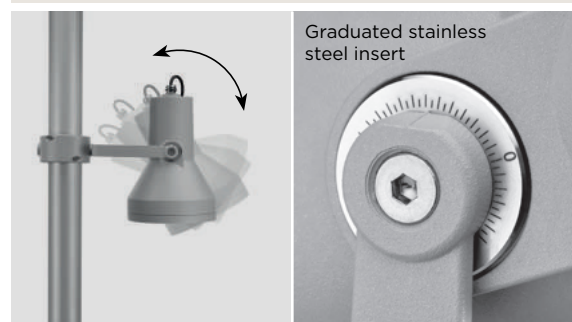


### Available on request



### Technical data










IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3 mt. neoprene power cable included



805009		SINGLE FLASH POLE MEGA - 22 WATT 220-240V 50-60HZ ELECTRONIC		
light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		10°	2.160	98.18
high-power led		30°	2.052	93.27
high-power led		45°	1.949	88.60
4000°K neutral-white				
high-power led		10°	2.250	102.28
high-power led		30°	2.137	97.14
high-power led		45°	2.030	92.27
2700°K CCT available on request				
Colors options				
 Textured Grey RAL 9006	 Anthracite Grey RAL 7016	 Matt Black (on request)		

Technical data	
Wattage	22 WATT
Light source	NR. 15 CREE "XP-G2" LED
Gross weight	5,50 Kg



805011		DOUBLE FLASH POLE MEGA - 2 X 22 WATT 220-240V 50-60HZ ELECTRONIC		
light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		10°	2 x 2.160	98.18
high-power led		30°	2 x 2.052	93.27
high-power led		45°	2 x 1.949	88.60
4000°K neutral-white				
high-power led		10°	2 x 2.250	102.28
high-power led		30°	2 x 2.137	97.14
high-power led		45°	2 x 2.030	92.27
2700°K CCT available on request				
Colors options				
 Textured Grey RAL 9006	 Anthracite Grey RAL 7016	 Matt Black (on request)		


Technical data	
Wattage	2 x 22 WATT
Light source	NR. 2 x 15 CREE "XP-G2" LED
Gross weight	10,50 Kg



## POLES & ACCESSORIES

Full technical details of poles and accessories for poles are available at the end of the catalogue

BURIED POLES	
code	h. mm.
809901	3.500
809902	4.500
809903	5.500
809909	ACC.



POLES WITH BASE-PLATE	
code	h. mm.
809904	3.000
809905	4.000
809906	5.000
809907	ACC.
809909	ACC.

