


805003-805007


FLASH POLE MAXI

Round pole-mounted floodlight for outdoor installation on a pole diam. 60 mm or 76 mm. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Clamp for pole diam 60 mm or 76 mm included. Built-in LED driver 220-240V 50-60Hz, with 8 CREE XP-G3 high-power LED. IP65 rating.

805003

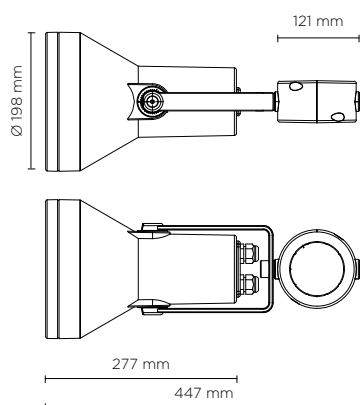

805007

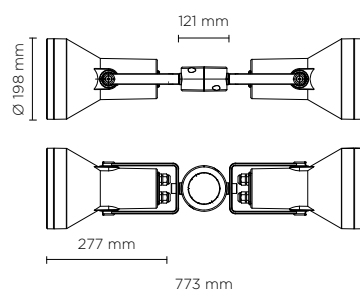

Technical features

IP65

IK09

CE

5 YEARS

⏏

Available on request

1-10V

DALI




Technical data







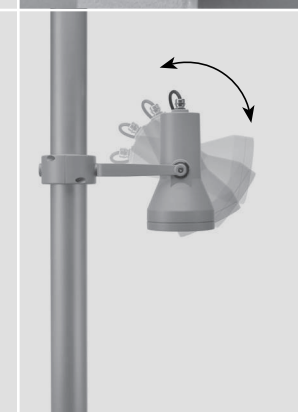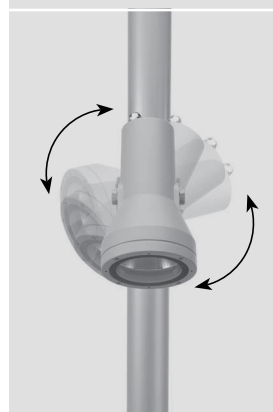


IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 220/240V 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3 mt. neoprene power cable included

AC-027 Anti-glare visor for hydroflash maxi












Graduated stainless steel insert



805003	SINGLE FLASH POLE MAXI - 12 WATT 220-240V 50-60HZ ELECTRONIC			
light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		10°	1.152	96.00
high-power led		30°	1.095	91.25
high-power led		45°	1.040	86.67
4000°K neutral-white				
high-power led		10°	1.200	100.00
high-power led		30°	1.140	95.00
high-power led		45°	1.083	90.25
2700°K CCT available on request				
Colors options				
 Textured Grey RAL 9006	 Anthracite Grey RAL 7016		 Matt Black (on request)	

Technical data	
Wattage	12 WATT
Light source	NR. 8 CREE "XP-G3" LED
Gross weight	4,00 Kg



805007	DOUBLE FLASH POLE MAXI - 2 X 12 WATT 220-240V 50-60HZ ELECTRONIC			
light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white				
high-power led		10°	2 x 1.152	96.00
high-power led		30°	2 x 1.095	91.25
high-power led		45°	2 x 1.040	86.67
4000°K neutral-white				
high-power led		10°	2 x 1.200	100.00
high-power led		30°	2 x 1.140	95.00
high-power led		45°	2 x 1.083	90.25
2700°K CCT available on request				
Colors options				
 Textured Grey RAL 9006	 Anthracite Grey RAL 7016	 Matt Black (on request)		


Technical data	
Wattage	2 x 12 WATT
Light source	NR. 2 x 8 CREE "XP-G3" LED
Gross weight	7,50 Kg



POLES & ACCESSORIES

Full technical details of poles and accessories for poles are available at the end of the catalogue

BURIED POLES	
code	h. mm.
809901	3.500
809902	4.500
809903	5.500
809909	TOP CAP DIAM 76mm.



POLES WITH BASE-PLATE	
code	h. mm.
809904	3.000
809905	4.000
809906	5.000
809907	ACC.
809909	TOP CAP DIAM 76mm

