




709001

NANO XS DOWNLIGHT

Round ceiling-recessed luminaire for outdoor installation, hard anodized black aluminium body and stainless steel AISI 316 front trim, tempered safety glass, moulded silicone gasket. Remote constant current max 700 mA driver needed, with 1 CREE XP-L LED. IP68 rating.

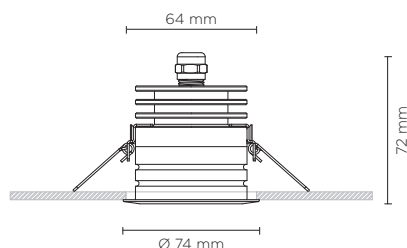

350 mA - LED POWER 1.2W

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led | 10° | 138 | 115.00 |
| high-power led | 30° | 132 | 110.00 |
| high-power led | 45° | 125 | 104.00 |
| 4000°K neutral-white | | | |
| high-power led | 10° | 144 | 120.00 |
| high-power led | 30° | 137 | 114.00 |
| high-power led | 45° | 131 | 109.00 |
| 2700°K CCT available on request | | | |

Finish color options:

 Stainless Steel







Technical features









Technical data

| | |
|---------------|-------------------------------------|
| Wattage | Max 2,5 WATT |
| IP Rating | IP68 |
| IK Rating | IK09 |
| Material | Hard anodized black aluminium body |
| Trim | Stainless steel AISI 316 L |
| Light source | NR. 1 x CREE XP-L LED |
| Remote driver | Constant current max 700 mA |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Cable gland | M12 |
| Power cable | 1 mt. neoprene power cable included |
| Gross weight | Kg 0,60 |

500 mA - LED POWER 1.7W

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--|---|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led |  10° | 196 | 115.00 |
| high-power led |  30° | 187 | 110.00 |
| high-power led |  45° | 177 | 104.00 |
| 4000°K neutral-white | | | |
| high-power led |  10° | 204 | 120.00 |
| high-power led |  30° | 194 | 114.00 |
| high-power led |  45° | 186 | 109.00 |
| 2700°K CCT available on request | | | |

700 mA - LED POWER 2.5W

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--|---|-------------------|------------------------|
| 3000°K warm-white | | | |
| high-power led |  10° | 288 | 115.00 |
| high-power led |  30° | 275 | 110.00 |
| high-power led |  45° | 260 | 104.00 |
| 4000°K neutral-white | | | |
| high-power led |  10° | 300 | 120.00 |
| high-power led |  30° | 285 | 114.00 |
| high-power led |  45° | 273 | 109.00 |
| 2700°K CCT available on request | | | |

GLARE SHIELD OPTIONS

AC055

STANDARD GLARE SHIELD

Glare shield accessory made in hard anodized black aluminum, providing good balance in between glare control and light output.

AC056

SUPER COMFORT GLARE SHIELD

Glare shield accessory made in hard anodized black aluminum, for applications requiring very reduced glaring; minimal light loss on the light surface but overall lumen output typically reduced by 50%.

remote driver selection

| brand | manufacturer code | type | watt | IP rate | numbers of fixtures |
|-------------|-------------------|------------------------|------|---------|---------------------|
| ALVIT Italy | AL1435S-IP | constant current 350mA | 14W | IP67 | min 1 - max 8 |
| ALVIT Italy | AL1450S-IP | constant current 500mA | 14W | IP67 | min 1 - max 6 |
| ALVIT Italy | AL1470S-IP | constant current 700mA | 14W | IP67 | min 1 - max 4 |



OPTIONAL

AC063
HONEYCOMB LOUVER

