




102203 RGBW

NANOSPOT MINI STEEL RGBW

Projector for outdoor installation on a façade/wall. Completely realised in stainless steel AISI 316L, tempered safety glass, moulded silicone gasket and stainless steel screws. Remote 24V DC power supply needed, remote DMX interface needed; with 1 x CREE “XML” RGBW LED. IP66 rating.

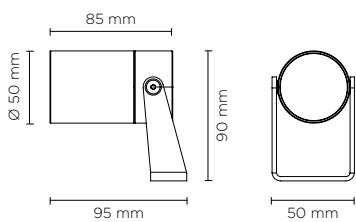

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
RGBW			
high-power led	12°	160	35.55
high-power led	25°	152	33.78
high-power led	35°	145	32.23

Finish color options:

 Stainless Steel

Technical features

IP 66

IK 09

CE

5 YEARS

DMX

Full RGB

NEW

Available on request

DALI

Technical data

Wattage	4.5 WATT
IP Rating	IP66
IK Rating	IK09
Material	Stainless steel AISI 316L
Light source	1 x CREE XM-L RGBW LED
Screws	Stainless steel
Remote driver	Constant voltage 24V DC
DMX interface	not included
Gasket	Silicone rubber
Glass	Tempered
Power cable	1,5 mt. power cable included
Gross weight	1,10 Kg

OTHER VIEW



OPTIONAL

AC044
SPIKE

AC095
HONEYCOMB LOUVER

AC038
TREE STRAP

AC127
ANTI-GLARE SNOOT

remote driver selection					
brand	manufacturer code	type	watt	IP rate	numbers of fixtures
Meanwell	LPV-20-24	Constant voltage 24C DV	20W	IP67	min 1 - max 3
Meanwell	LPV-35-24	Constant voltage 24C DV	35W	IP67	min 1 - max 6

