




101902

NANOSPOT MINI COB

Projector for outdoor installation on a façade/wall. Body in anodized aluminum with phospho-chromatised and polyester powder coating, bracket in stainless steel, tempered safety glass, moulded silicone gasket and stainless steel screws. With 1 direct 220-240V LUMENS “EDC 38C” COB LED. IP66 rating.

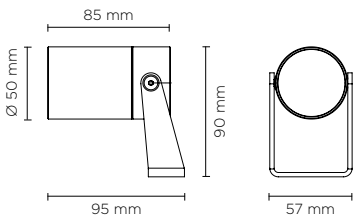

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|--|--------------------|-------------------|------------------------|
| 3000°K warm-white | | | |
| cob led | 20° | 400 | 50.00 |
| cob led | 40° | 390 | 48.75 |
| 4000°K neutral-white | | | |
| cob led | 20° | 410 | 51.25 |
| cob led | 40° | 400 | 50.00 |
| 2700°K CCT available on request | | | |

| | | |
|------------------------------|--------------------------|-------------------------|
| Finish color options: | | |
| Textured Grey RAL 9006 | Anthracite Grey RAL 7016 | Matt Black (on request) |

Technical features

IP66

IK09

CE

5 YEARS

| | |
|-----------------------|---|
| Technical data | |
| Wattage | 8 WATT |
| IP Rating | IP66 |
| IK Rating | IK09 |
| Material | Hard anodized aluminum |
| Coating | Polyester powder coating with phosphocromating pre-finish |
| Light source | 1 x LUMENS “EDC 38C” COB LED |
| Screws | Stainless steel |
| Transformer | Electrical power supply 220/240V 50/60Hz built-in |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Power cable | 1,5 mt. power cable included |
| Gross weight | 0,60 Kg |

OTHER VIEW



OPTIONAL

AC044
SPIKE

AC095
HONEYCOMB LOUVER

AC038
TREE STRAP

AC098
ANTI-GLARE SNOOT

ACCESSORIES

AC100 **PIPE L 300 mm**

Extension pipe length 300 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

AC101 **PIPE L 600 mm**

Extension pipe length 600 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

AC102 **PIPE L 900 mm**

Extension pipe length 900 mm made in anodized aluminum with phospho-chromatised and polyester powder coating.

