







500 mA – LED POWER 4.5W

light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white				
high-power led	 10°x45° ELLIPTICAL		350	77.75
3000°K warm-white				
high-power led	 10°x45° ELLIPTICAL		360	80.25
4000°K neutral-white				
high-power led	 10°x45° ELLIPTICAL		369	82.00



700 mA – LED POWER

light source	light beam options		lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white				
high-power led	 10°x45° ELLIPTICAL		501	83.60
3000°K warm-white				
high-power led	 10°x45° ELLIPTICAL		507	84.60
4000°K neutral-white				
high-power led	 10°x45° ELLIPTICAL		518	86.30

505005

NANOSTEP LINEAR TRIMLESS

Trimless version, all other details are same as model 505004

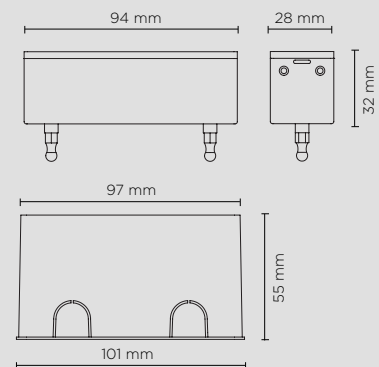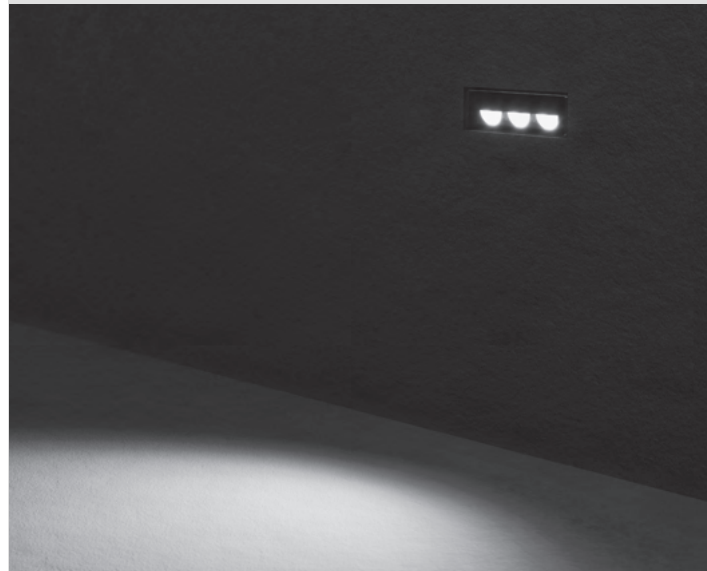

remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
ALVIT Italy	AL1435S-IP	constant current 350mA	14W	IP67	min 1 – max 4
ALVIT Italy	AL1450S-IP	constant current 500mA	14W	IP67	min 1 – max 3
ALVIT Italy	AL1470S-IP	constant current 700mA	14W	IP67	min 1 – max 2
TCI Italy	152014/350	constant current 350mA	17W	IP68	min 1 – max 5
TCI Italy	152014/500	constant current 500mA	24W	IP68	min 1 – max 5
TCI Italy	152014/700	constant current 700mA	30W	IP68	min 1 – max 4