



502020

## STEP LINEAR 07

Recessed linear steplight for outdoor installation in the wall, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body and frame, tempered frosted glass diffuser, polypropilene housing for recess, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz, with 30 low-power SMD5630 LED. IP65 rating.

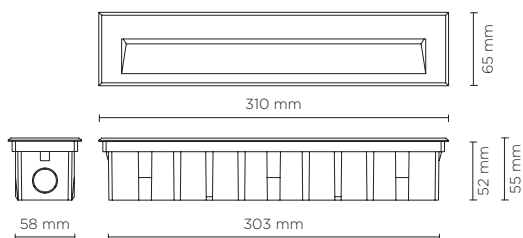

| light source             | light beam options  | lumen output (lm) | lumin. efficacy (lm/w) |
|--------------------------|---|-------------------|------------------------|
| <b>3000°K warm-white</b> |   |                   |                        |
| low power led            |  Asymmetric 120° | 360               | 34.28                  |

### Finish color options:

 Textured Grey  
RAL 9006

### Technical features



### Technical data

|              |   |
|--------------|---|
| Wattage      | 10.5 WATT   |
| IP Rating    | IP65  |
| IK Rating    | IK08  |
| Material     | High corrosion resistance die-cast copper-free aluminum body and frame. |
| Coating      | Polyester powder coating with phosphocromating pre-finish               |
| Light source | NR. 30 x SMD5630 LED  |
| Screws       | Stainless steel   |
| Transformer  | Electronic power supply 220/240V 50/60Hz built-in                       |
| Cable        | 0.5 mt. neoprene power cable included                                   |
| Gasket       | Silicone rubber   |
| Glass        | Tempered  |
| Gross weight | 1,50 Kg   |

