





207013

TERRA MEDIUM HP DMX RGBW

Diameter 205mm ground-recessed luminaire for outdoor installation, phosphochromatised and polyester powder coated die-cast copper-free aluminium body and stainless steel AISI 316L frame, tempered safety glass, moulded silicone gasket. Light source tilt system $\pm 15^\circ$ from outside. Built-in LED driver, DMX interface integrated; with 3 x CREE "XML" RGBW LED. IP67 rating.

| light source | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|----------------|---|-------------------|------------------------|
| RGBW | | | |
| high-power led |  12° | 480 | 34.28 |
| high-power led |  25° | 456 | 32.58 |
| high-power led |  35° | 435 | 31.07 |

Finish color options:

 Stainless Steel

ACCESSORIES




AC118
HONEYCOMB LOUVER
FOR TERRA MEDIUM

Technical features



Available on request

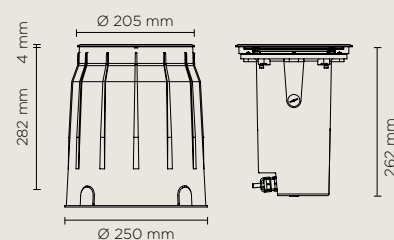

Technical data

| | |
|--------------|---|
| Wattage | 14 WATT |
| IP Rating | IP67 |
| IK Rating | IK10 |
| Material | high corrosion resistance die-cast copper-free aluminum |
| Trim | Stainless steel AISI 316L |
| Coating | polyester powder coating with phosphochromating pre-finish |
| Light Source | Nr. 3 CREE "XML" RGBW LED |
| Screws | Stainless steel |
| Transformer | Electrical power supply 220/240V 50/60Hz built-in |
| DMX | DMX interface integrated |
| Gasket | Silicone rubber |
| Glass | Tempered |
| Cable gland | M20 + PG9 |
| Power cable | 1 mt. neoprene power cable included |
| DMX cable | DMX IN cable included |
| Gross weight | 5,40 Kg |

