



403203

## WALLBOX MINI ASYMMETRIC 01

Wall applique for outdoor wall installation, with one side light distribution. Luminaire body is made of extruded copper-free aluminum, secured with die-cast aluminum base, tempered safety glass and stainless steel screws. Asymmetrical wide light distribution. Built-in LED driver 220-240V 50-60Hz, with 20 x mid-power SAMSUNG 2835 LED. IP66 rating.

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>2700°K warm-white</b>			
mid-power led	ASYMMETRIC FORWARD 110°x70°	560	70.00
mid-power led	ASYMMETRIC BACKWARD 110°x70°	560	70.00
<b>3000°K warm-white</b>			
mid-power led	ASYMMETRIC FORWARD 110°x70°	570	71.25
mid-power led	ASYMMETRIC BACKWARD 110°x70°	570	71.25
<b>4000°K neutral-white</b>			
mid-power led	ASYMMETRIC FORWARD 110°x70°	590	73.75
mid-power led	ASYMMETRIC BACKWARD 110°x70°	590	71.25

### Finish color options:

 Textured Grey  
RAL 9006

 Anthracite Grey  
RAL 7016

 Matt Black  
(on request)

### Technical features

IP66

IK08

CE


5  
YEARS



NEW

### Available on request

DALI

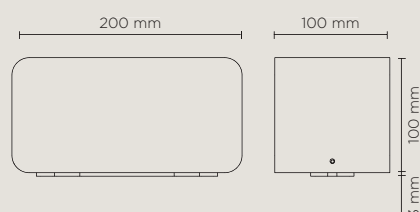

### Technical data

Wattage	8 WATT
IP Rating	IP66
IK Rating	IK08
Material	High corrosion resistance extruded copper-free aluminium
Coating	Polyester powder coating wit phosphochromating pre-finish
Light source	20 x mid-power SAMSUNG 2835 LED
Screws	Stainless steel
Transformer	Electrical power supply 220/240V 50/60Hz built-in
Glass	Tempered
Power cable	0,5 mt. power cable included
Gross weight	1,70 Kg

