

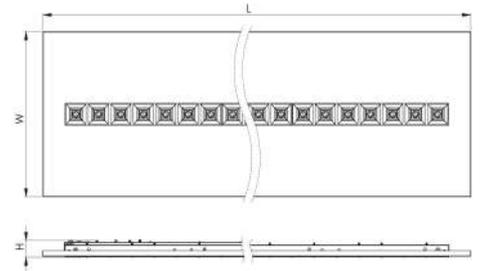


# LANDO RANGE



 IP20
  IK05
  L80/B10
  UGR<19  
 100,000 hrs

The Lando is a high-quality recessed modular luminaire that boasts upto 167 lm/cW efficacy and LG7 compliance. Its low glare louvre makes it both visually pleasing and suitable for various installations, especially those with shallow ceiling voids.

The Lando is available in 4000K as standard, and 3000K on request, it is energy-efficient, flicker-free, and produces minimal heat, ensuring a long lifespan of at least 100,000 hours. This makes it an ideal, eco-friendly choice for commercial and retail applications.

The Lando range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Length mm	Width mm	Height mm	Efficacy lm/W	CCT K
TLLAN/63/2000/4K	13	2111	595	295	31	158	4,000
TLLAN/66/4000/4K	26	4222	595	595	31	162	4,000
TLLAN/123/4000/4K	26	4222	1195	295	31	162	4,000
TLLAN/126/3500/4K	51	8445	1195	595	31	167	4,000

DD = DALI Dimmable  
 E = Emergency  
 3K = 3000K CCT

SD = SwitchDim  
 ST = Self Test Emergency

MD = Mymesh Dim  
 ME = Mymesh Emergency

CD = Casambi Dim  
 SL\*\* = Slave