




KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP20
- IK rating: IK06
- 90 lumens output
- CCT: 4000K
- CRI: >80
- Lifetime: 50,000 hrs
- 34m viewing distance
- BESA fixings and 20mm conduit entry
- Steel housing
- Operating Temperature: 0°C ~ +40°C

DIMENSIONS

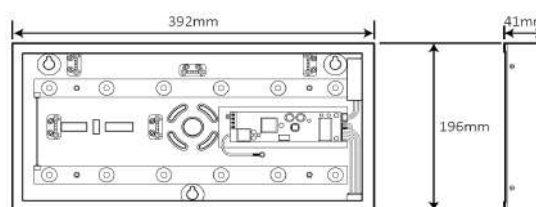

TECHNICAL INFORMATION

Part code	Emergency outout power (W)	Max power consumption (W)	Standy power (W)	Battery	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
TLCRX	1.5	5.0	<0.5	Li-ion 3.6V 2.5Ah	392	41	196	1.1

Options

Suffix

Self-test emergency	/ST
DALI addressable emergency	/DE



Legend

Accessories

Legend - Arrow down	TLCRX/AD
Legend - Arrow left/right	TLCRX/ALR

SELF-TEST

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	Slow Flash	Light source fault

DALI-2

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Duration test in progress
Fast Flash	Off	Function test in progress
Off	On	Battery temp. out of operational range
Off	Slow Flash	Battery disconnected / Duration test failed
Off	Fast Flash	Battery low voltage
Off	Off	Emergency function in operation
Alternating G > R > G...		DAU-2 identifying code