




KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP66
- Efficiency: 120Lm/W
- CCT: 3000K / 4000K / 6500K
- CRI: >80
- Beam Angle: >120°
- Polycarbonate body and opal polycarbonate diffuser
- 90° Lock-in Clip Design with Security Screws
- Multiple Cable Conduit Entries
- Complete with Stainless Steel Mounting Brackets
- Operating Temperature: -10°C ~ +40°C

DIMENSIONS

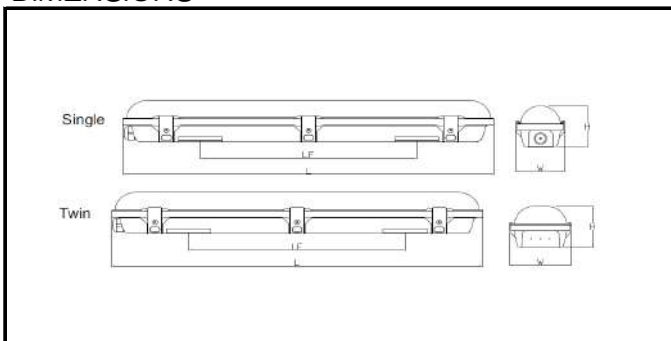

TECHNICAL INFORMATION

Part code	LED output (lm)	Luminaire power (W)	Luminaire efficacy (lm/W)	Colour temp (K)	Length (mm)	Width (mm)	Height (mm)	LF (mm)
TLGEM/S/12/CCT	1320/1800/2160/2400	11/15/18/20	120	CCT	1200	80	72	780
TLGEM/T/12/CCT	2640/3360/4080/4800	22/28/34/40	120	selectable	1200	100	72	780
TLGEM/S/15/CCT	1920/2760/3120/3600	16/23/26/30	120	3000/	1500	80	72	1080
TLGEM/T/15/CCT	4080/5160/6240/7200	34/43/52/60	120	4000/	1500	100	72	1080
TLGEM/T/18/CCT	6000/7200/8400/9600	50/60/70/80	120	6500	1800	100	72	1380

Options

Options	Suffix
Switch dimmable	/DD
DALI dimmable	/SD

Accessories

Plug and Play microwave sensor	TLGEM/MW
Plug and Play emergency pack	TLGEM/EP



Plug & play emergency pack



Plug & play microwave sensor