
Hydra

IP65 emergency bulkhead

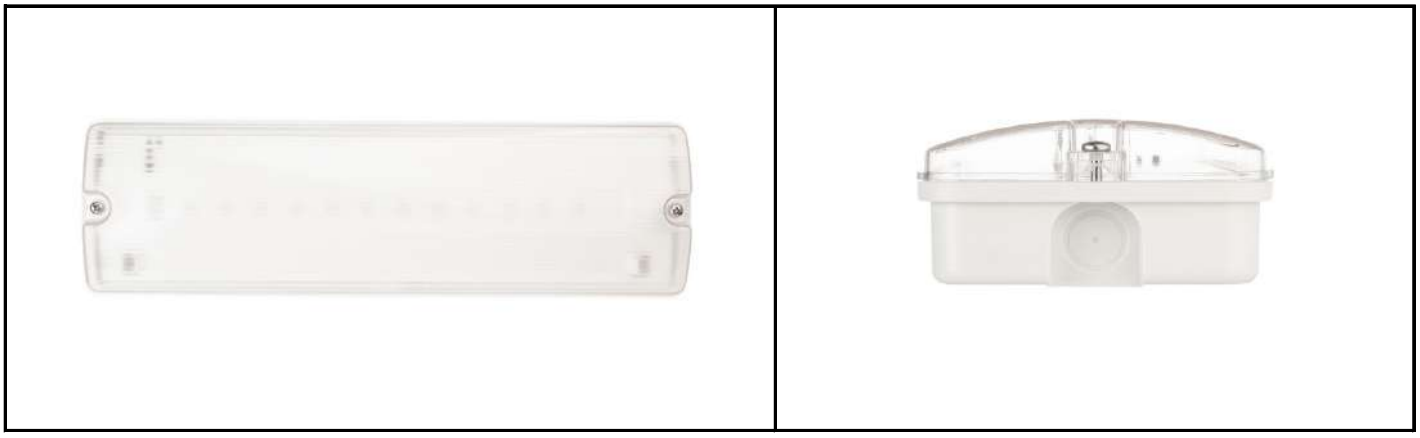

KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP65
- IK rating: IK10
- CCT: 4000K
- CRI: >80
- Lifetime: 50,000 hrs
- Beam angle: 108° x 100°
- Maintained or non-maintained
- IP65 cable gland and legend pack included. 20m viewing distance
- Polycarbonate housing
- Operating Temperature: 0°C ~ +40°C

DIMENSIONS



TECHNICAL INFORMATION

Part code	Type	Emergency outout power	Max power consumption (W)	Standy power (W)	Battery	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
TLHYD/1/M	Maintained	1.5W / 200lm	5.0	<0.5	Li-ion 3.6V 2.5Ah	355	109	61	0.6
TLHYD/1/ST	Self-test	1.5W / 200lm	5.0	<0.5	Li-ion 3.6V 2.5Ah	355	109	61	0.6
TLHYD/3/M	Maintained	3W / 325lm	5.0	<0.5	Li-ion 3.6V 5.0Ah	355	109	61	0.7
TLHYD/3/ST	Self-test	3W / 325lm	5.0	<0.5	Li-ion 3.6V 5.0Ah	355	109	61	0.7
TLHYD/3/DE	DALI	3W / 325lm	5.0	<0.5	Li-ion 3.6V 5.0Ah	355	109	61	0.7



Recessing bracket

Accessories

Recessing bracket	TLHYD/RB

SELF-TEST

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	Slow Flash	Light source fault

DALI-2

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Duration test in progress
Fast Flash	Off	Function test in progress
Off	On	Battery temp. out of operational range
Off	Slow Flash	Battery disconnected / Duration test failed
Off	Fast Flash	Battery low voltage
Off	Off	Emergency function in operation
Alternating G > R > G...		DALI-2 identifying code

mymesh by Chess
CASAMBI
Get In Touch
+44 (0)1744 368 289
sales@trojan-lighting.co.uk
MADE IN BRITAIN