



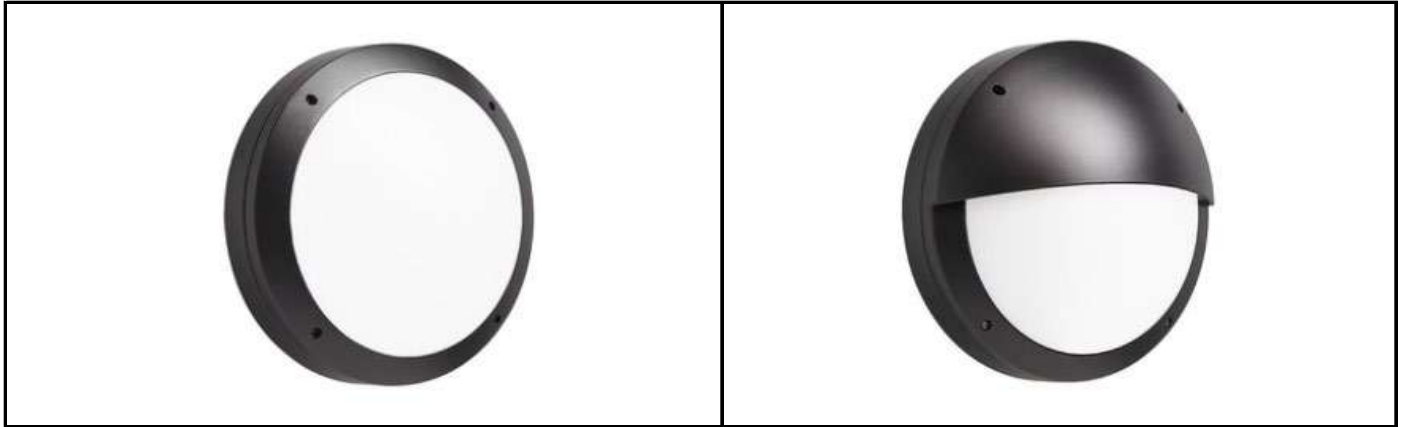

KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP65
- IK Rating: IK08
- Efficiency: 110Lm/W
- CCT: 4000K
- CRI: >80
- LED lifetime: >50,000 hrs
- Die cast aluminium housing
- Powder coated RAL 9005
- Glow Wire Testing (TP rating) 750°C / TP(b)
- Operating Temperature: -15°C ~ +45°C

DIMENSIONS

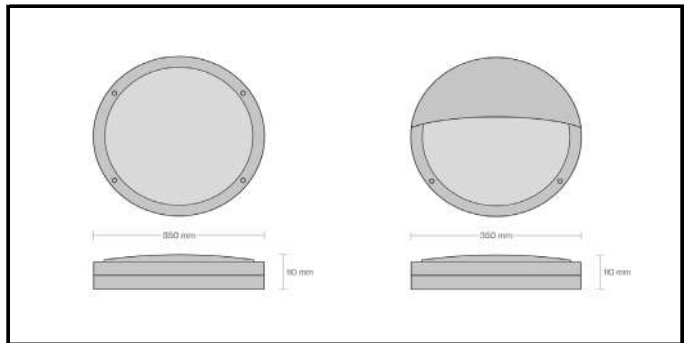

TECHNICAL INFORMATION

Part code	LED output (lm)	Luminaire power (W)	Luminaire efficacy (lm/W)	Colour temp (K)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
TLLIB/O/4K	2420	22	110	4000	350	350	110	2.2
TLLIB/E/4K	1430	13	110	4000	350	350	110	2.4

Options

Options	Suffix
Switch dimmable	/SD
DALI dimmable	/DD
3hr emergency	/E
Self-test emergency	/ST

Accessories

Plug & play microwave sensor	TLLIB/MW
------------------------------	----------



Plug & play microwave sensor