




KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP65
- IK Rating: IK08
- Efficiency: up to 183Lm/W
- CCT: 3000K / 4000K / 5500K, CRI: >80
- Beam Angle: 120°
- Plug in microwave sensor that can be turned off via remote control
- Die cast aluminium housing and heatsink
- Clear polycarbonate lens TP(a)
- Supplied with Philips Xitanium 1-10V dimming driver
- Operating Temperature: -40°C ~ +45°C

DIMENSIONS

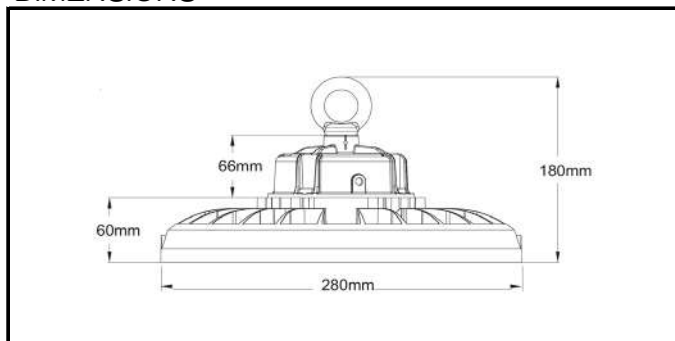

TECHNICAL INFORMATION

Part code	LED output (lm)	Luminaire power (W)	Luminaire efficacy (lm/W)	Colour temp (K)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
TLLUN/CCT	16566 / 19952 / 24296	100 / 120 / 150	185	CCT selectable 3000/ 4000/ 5500	280	280	180	2.2

Accessories

Plug & play microwave sensor	TLLUN/MW
Remote control handset	TLLUN/RC
Emergency pack	TLLUN/EP



3hr emergency pack

- Input voltage: 100-277VAC 50/60Hz
- Input current: 100mA max.
- Charging power: 5W max.
- Charging current: 0-350mA
- Charging time: ≥ 24 hours
- Emergency output voltage: DC100-260V
- Emergency output current: 58-150mA
- Emergency power: 15W-3 hours
- Battery: LiFePO4, 327000 mA 9.6V
- Battery overcharge/discharge protection and short circuit protection
- IP rating: IP65
- Case temperature: tc 60°C Max.