Lynx

Blade exit sign

TROJAN
INTELLIGENT LIGHTING SOLUTIONS






KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP20
- IK rating: IK06
- CCT: 4000K
- CRI: >80
- Lifetime: 50,000 hrs
- 30m viewing distance
- Can be suspended, recessed, wall or ceiling mounted
- Blanking sheet including for single sided applications
- Polycarbonate housing
- Operating Temperature: 0°C ~ +40°C

DIMENSIONS

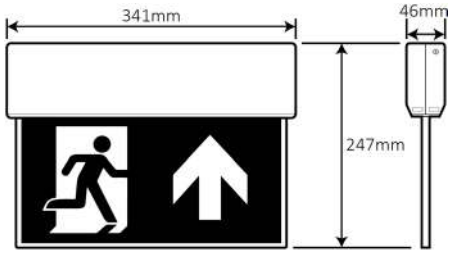

TECHNICAL INFORMATION

Part code	Emergency outout power (W)	Max power consumption (W)	Standy power (W)	Battery	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
TLLNX	1.5	5.0	<0.5	Li-ion 3.6V 2.5Ah	341	46	247	1.0

Options	Suffix
Self-test emergency	/ST
DALI addressable emergency	/DE



Legend



Recessing bracket



2m suspension kit

Accessories	
Legend - Arrow down	TLLNX/AD
Legend - Arrow left/right	TLLNX/ALR
Recessing bracket	TLLNX/RB
Suspension kit - 2m	TLLNX/SK

SELF-TEST

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	Slow Flash	Light source fault

DALI-2

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Duration test in progress
Fast Flash	Off	Function test in progress
Off	On	Battery temp. out of operational range
Off	Slow Flash	Battery disconnected / Duration test failed
Off	Fast Flash	Battery low voltage.
Off	Off	Emergency function in operation
Alternating G > R > G...		DALI-2 identifying code

mymesh by Chess
CASAMBI

Get In Touch

+44 (0)1744 368 289
sales@trojan-lighting.co.uk

MADE IN BRITAIN