




KEY FEATURES

- Input Voltage: 180-240Vac 50/60Hz
- IP Rating: IP66
- IK Rating: IK06
- Efficiency: 150Lm/W
- CCT: 4000K
- CRI: >80
- Beam angle: 90°
- Die cast aluminium housing
- Powder coated black
- Fitted with tempered glass
- Wattage selectable

DIMENSIONS

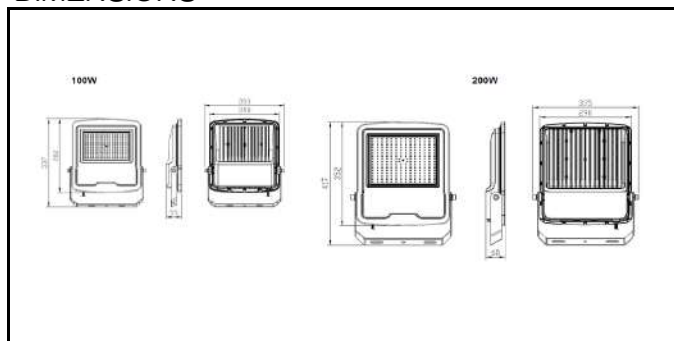

TECHNICAL INFORMATION

Part code	LED output (lm)	Luminaire power (W)	Luminaire efficacy (lm/W)	Colour temp (K)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
TLORI/100/4K	7500 / 12500 / 15000	50 / 75 / 100	150	4000	337	283	55	2.7
TLORI/200/4K	15000 / 22500 / 30000	100 / 150 / 200	150	4000	417	335	60	4.8