




KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP20
- IK rating: IK06
- CCT: 4000K
- CRI: >80
- Lifetime: 50,000 hrs
- Polycarbonate housing
- Downlight bezel for use with existing oversized cutouts
- Operating Temperature: 0°C ~ +40°C

DIMENSIONS

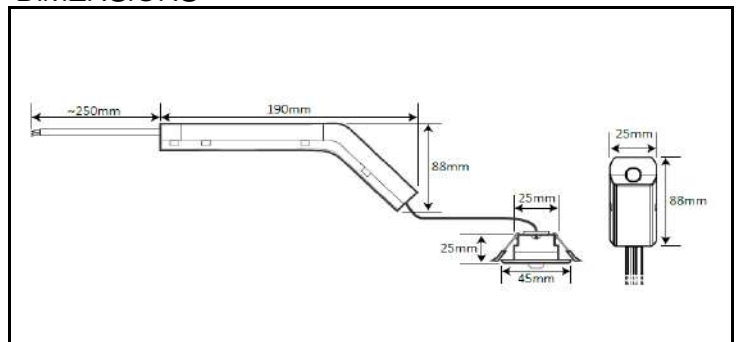

TECHNICAL INFORMATION

Part code	Emergency outout power (W)	Max power consumption (W)	Standy power (W)	Battery	Lens type	Beam angle	Lumen output	Weight (kg)
TLPHO/OA	1.5	5.0	<0.5	Li-ion 3.6V 2.5Ah	Open area	127°	190 lm	0.15
TLPHO/CO	1.5	5.0	<0.5	Li-ion 3.6V 2.5Ah	Corridor	147° x 80°	170 lm	0.15

Options

Options	Suffix
White head	/WH
Black head	/BL
Self-test emergency	/ST

Accessories

Ø80mm bezel	TLPHO/BZ
-------------	----------



Ø80mm bezel

SELF-TEST

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	slow Flash	Light source fault