Pisces

IP65 Twin spot

TROJAN
INTELLIGENT LIGHTING SOLUTIONS






KEY FEATURES

- Input Voltage: 220-240Vac 50/60Hz
- IP Rating: IP65
- IK rating: IK10
- CCT: 4000K
- CRI: >80
- Lifetime: 50,000 hrs
- Polycarbonate housing
- 20mm conduit entry points
- Operating Temperature: 0°C ~ +40°C

DIMENSIONS

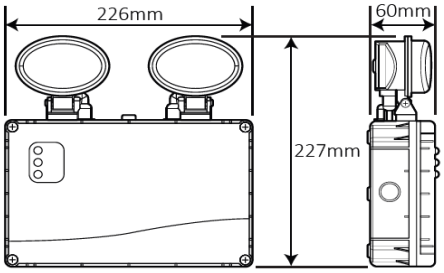

TECHNICAL INFORMATION

Part code	Emergency outout power (W)	Max power consumption (W)	Standy power (W)	Battery	Lens type	Beam angle	Lumen output	Weight (kg)
TLPIS/440	3	5.0	<0.5	Li-ion 3.6V 5.0Ah	Frosted	112° x 112°	440 lm	0.80
TLPIS/1000	6	5.0	<0.5	Li-ion 3.6V 5.0Ah	Frosted	122° x 100°	1000 lm	0.90

Options	Suffix
Self-test emergency	/ST
DALI emergency (440lm only)	/DE

SELF-TEST

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	Slow Flash	Light source fault

DALI-2

Indicator LED Guide

GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Duration tast in progress
Fast Flash	Off	Function tast in progress
Off	On	Battery temp. out of operational range
Off	Slow Flash	Battery disconnected / Duration test failed
Off	Fast Flash	Battery low voltage.
Off	Off	Emergency function in operation
Alternating G > R > G...		DALI-2 identifying code