




KEY FEATURES

- Input Voltage: 100-240Vac 50/60Hz
- Power factor: 0.95
- IP Rating: IP65
- IK rating: IK09
- Efficiency: >90Lm/W
- CCT: 3000K / 4000K
- CRI: >80
- 3 head design to choose from
- Die cast aluminium powder coated RAL 9005
- Complete with stainless steel anti-vandal screw
- Operating Temperature: -25°C ~ +45°C

DIMENSIONS

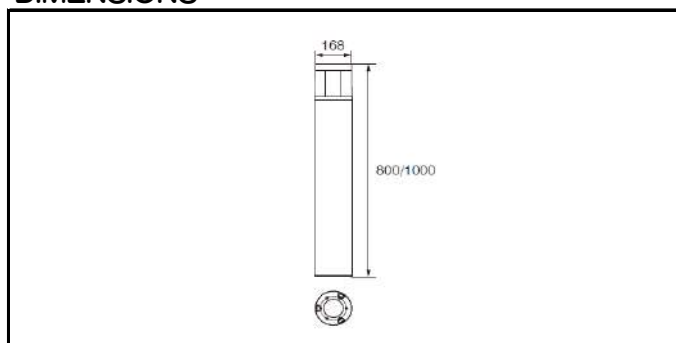

TECHNICAL INFORMATION

Part code	LED output (lm)	Luminaire power (W)	Luminaire efficacy (lm/W)	Colour temp (K)	Diameter (mm)	Height (mm)	Weight (kg)	Head type
TLTAU/D/800/CCT	2400	25	90	CCT selectable 3000 / 4000	168	800	2.1	Dome
TLTAU/F/800/CCT	2400	25	90		168	800	2.0	Flat
TLTAU/L/800/CCT	950	25	35		168	800	2.1	Louvre
TLTAU/D/1000/CCT	2400	25	90		168	1000	2.6	Dome
TLTAU/F/1000/CCT	2400	25	90		168	1000	2.5	Flat
TLTAU/L/1000/CCT	950	25	35		168	1000	2.6	Louvre

Accessories

Root mount kit

TLTAU/RMK



Root mount kit

