




609004

# BOULEVARD 02 360

Designed by  
MOMO DESIGN

600mm height bollard, round shape, for outdoor surface installation, 360° light emission, phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, polycarbonate diffuser, moulded silicone gasket and stainless steel screws. Anchorage bolts included. Built-in LED driver 220-240V 50-60Hz, with 24 CREE XH-G mid-power LED. IP65 rating.

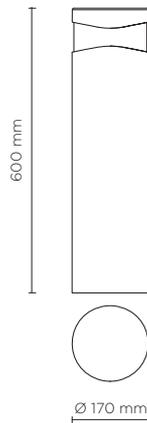

| light source* | light beam options | lumen output (lm) | lumin. efficacy (lm/w) |
|---------------|--------------------|-------------------|------------------------|
|---------------|--------------------|-------------------|------------------------|

### 3000°K warm-white

|               |  |       |       |
|---------------|--|-------|-------|
| mid power led |  360° | 1.600 | 84.21 |
|---------------|--|-------|-------|

### 2700°K CCT available on request

\* Other light colors available on request: Neutral-white

### Finish color options:

|   |   |  |
|---|---|--|
|  Textured Grey<br>RAL 9006 |  Anthracite Grey<br>RAL 7016 |  Matt Black<br>(on request) |
|---|---|--|

### Technical features



### Available on request



### Technical data

|              |   |
|--------------|---|
| Wattage      | 18 WATT   |
| IP Rating    | IP65  |
| IK Rating    | IK10  |
| Material     | High corrosion resistance die-cast copper-free aluminum body and frame. |
| Coating      | Polyester powder coating with phosphochromating pre-finish              |
| Light source | NR. 24 CREE XH-G mid-power LED  |
| Screws       | Stainless steel   |
| Transformer  | Electronic power supply 220/240V 50/60Hz built-in                       |
| Gasket       | Silicone rubber   |
| Diffuser     | Polycarbonate diffuser  |
|              | Anchorage unit included   |
| Gross weight | 5,70 Kg   |

